

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
25 April 2002 (25.04.2002)

PCT

(10) International Publication Number  
**WO 02/32596 A1**

(51) International Patent Classification<sup>7</sup>: **B21D 26/02**

(21) International Application Number: PCT/IB01/01946

(22) International Filing Date: 16 October 2001 (16.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/241,337 19 October 2000 (19.10.2000) US

(71) Applicant (for all designated States except US): **COSMA INTERNATIONAL INC.** [CA/CA]; 50 Casmir Court, Concord, Ontario L4K 4J5 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **COBB, Mark** [CA/CA]; 14583 Kennedy Road, R.R. #1, Inglewood, Ontario L0N 1K0 (CA). **GENSEBERGER, Erich** [AT/CA]; 21 Keily Crescent, Bolton, Ontario L7E 5S1 (CA).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS AND METHOD FOR HYDROFORMING A TUBULAR PART

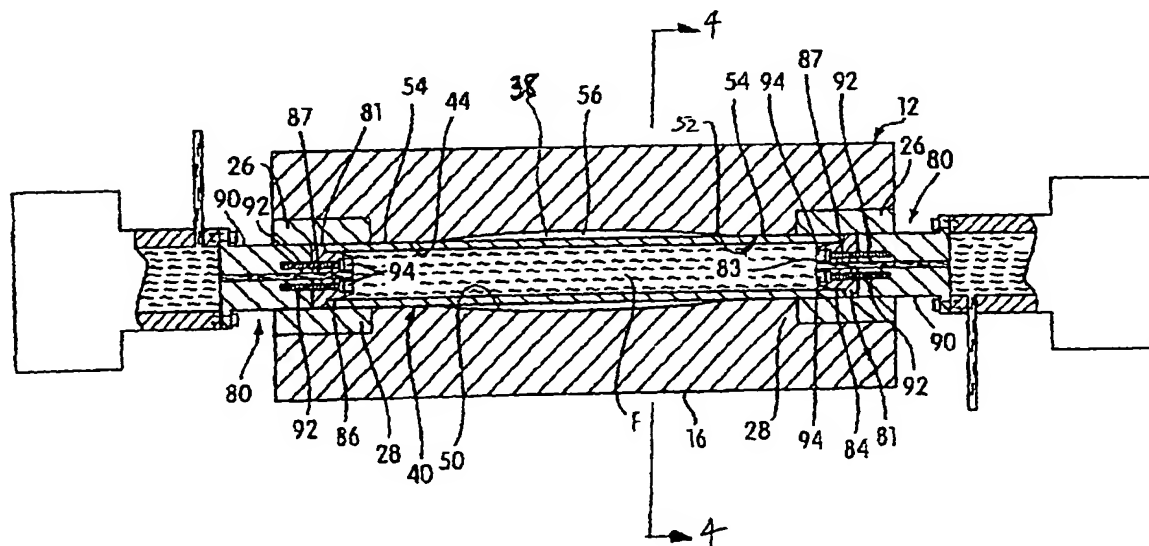

(57) Abstract: A method and apparatus for shaping a raw tube (40) into a formed part. The part can be configured within a die assembly including a hydroforming die structure (12, 14) and a pair of tube-engaging punches (81). The punches are inserted into the ends of the raw tube to shape the ends into the desired configuration. The middle portion of the raw tube is shaped into the desired configuration by hydroforming. Thus, the method and apparatus can shape the raw tube along its entire length, leaving no remnants of the raw tube that must be trimmed away.

**APPARATUS AND METHOD FOR HYDROFORMING A TUBULAR PART**

This application claims the benefit of U.S. Provisional Application No. 60/241,337, filed on October 19, 2000, the entire contents of which are incorporated herein by reference  
5 thereto.

**FIELD OF THE INVENTION**

The invention relates generally to an improved apparatus and method for more efficiently hydroforming a tubular part. More specifically, the invention relates to an apparatus  
10 and method that uses a punch to shape each end of the part into the desired configuration and hold the part during hydroforming.

**BACKGROUND OF THE INVENTION**

Typically, to form a tubular part by hydroforming, a raw tube is positioned within a  
15 hydroforming tool and the tube is secured at its ends. The middle portion of the raw tube is then subjected to hydroforming, leaving a transitional zone between the ends of the raw tube and the hydroformed middle portion. The hydroformed part is then finished by having the two transition zones removed from the tube, leaving only the fully hydroformed middle portion.

This process of removing the ends of the hydroformed part creates inefficiencies. For  
20 example, the ends that are cut away from the finished part become wasted raw material. Also, the step of cutting away the ends requires additional cutting tools, which complicates the apparatus needed to create the finished part. Further, time is wasted since completion of the finished part requires the added step of cutting off the transitional zones at each end.

Some examples of hydroforming are found in the U.S. Patent Nos. 5,987,950 to Horton  
25 and 6,014,950 to Jaekel et al.

## SUMMARY OF THE INVENTION

One object of the present invention is to provide an improved apparatus and method for forming a hollow part.

Another object of the present invention is to provide an improved apparatus and method  
5 for efficiently and cost effectively shaping a hollow part by mechanically shaping at least one end of the part and by hydroforming a portion of the part.

Still another object of the invention is to provide an apparatus and method for forming a part that uses a punch to secure each end of the part while the punch shapes the end so that each end has the same configuration as a hydroformed, middle portion.

10 The forgoing objects are basically attained by providing a hydroforming die assembly for hydroforming a part from a tubular blank, the part having a desired configuration different from a configuration of the blank and including a desired cross section at one end thereof, the die assembly comprising: a die structure having interior surfaces defining a die cavity, the die cavity having a cross sectional configuration conforming to the desired cross section of the  
15 part; and a pair of tube-end engaging structures disposed at opposite ends of the die cavity and constructed and arranged to engage opposite ends of the tubular blank, the tube-end engaging structures being constructed and arranged to seal the opposite ends of the tubular blank and to pressurize hydroforming fluid within the tubular blank for expanding the tubular blank into conformity with the interior surfaces of the die cavity, a first of the tube-end  
20 engaging structures having an outer cross-sectional configuration corresponding to the desired cross section at one end of the part, the first of the tube-engaging structures being movable into forced engagement with one end of the tubular blank to conform the one end of the tubular blank to the outer cross-sectional configuration of the first of the tube-engaging structures and hence the predetermined cross section at the one end of the part.

25 The forgoing objects are also attained by providing a method of forming a

hydroformed part comprising the steps of: providing a hydroforming die assembly for hydroforming a part from a tubular blank, the part having a desired configuration different from a configuration of the blank and including a desired cross section at one end of the part, the die assembly including a die structure having interior surfaces defining a die cavity, the die cavity having a cross sectional configuration conforming to the desired cross section of the part, and a pair of tube-end engaging structures disposed at opposite ends of the die cavity and constructed and arranged to engage opposite ends of the tubular blank, the tube-end engaging structures being constructed and arranged to seal the opposite ends of the tubular blank and to pressurize hydroforming fluid within the tubular blank for expanding the tubular blank into conformity with the interior surfaces of the die cavity, a first of the tube-end engaging structures having an outer cross-sectional configuration corresponding to the desired cross section at one end of the part; moving the first of the tube-engaging structures into forced engagement with one end of the tubular blank to conform the one end of the tubular blank to the outer cross-sectional configuration of the first of the tube-engaging structures and hence the predetermined cross section at the one end of the part; and applying pressure within the tubular blank to form the tubular blank in to the desired configuration of the part.

Other objects, advantages, and features of the invention will become apparent from the following detailed description, appended drawings, and claims.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an exploded perspective view showing upper and lower die structures and box-shaped punches of a hydroforming die assembly in accordance with the principles of the present invention;

FIG. 2 is a longitudinal section view of the hydroforming die assembly along section line 1-1 in FIG. 1, and including a tubular blank positioned within the lower die structure, the

upper die structure shown in the raised or fully open position, and box-shaped punches engaging the ends of the tubular blank;

FIG. 3 is a longitudinal sectional view of the hydroforming die assembly, similar to FIG. 2, but showing the upper die structure in a fully lowered position, with the tubular blank positioned within the lower die structure, the box-shaped punches inserted into the ends of the tubular blank, and fluid injected into the tubular blank;

FIG. 4 is a cross-section taken through section line 4-4 in FIG. 3 and showing an unexpanded oval tubular blank disposed within the hydroforming assembly and filled with hydroforming fluid;

FIG. 5 is a cross-section taken through line 5-5 in FIG. 9 showing the tubular blank expanded by fluid under pressure within the expansion region of the cooperating upper and lower hydroforming dies;

FIG. 6 is a partial perspective view, partially in cross-section, of a box-shaped punch engaging a tubular blank;

FIG. 7 is a longitudinal sectional view taken through line 7-7 in FIG. 6 showing a box-shaped punch;

FIG. 8 is a cross-sectional view along section line 8-8 in FIG. 9 showing the end of the tubular blank between upper and lower clamping structures with a box-shaped punch inserted therein;

FIG. 9 is a longitudinal section view showing a hydroforming step wherein the upper die structure is in the fully lowered position and a tubular blank has been hydroformed into an expanded configuration by fluid under pressure;

FIG. 10 is a longitudinal section view showing the use of hydroforming ram extenders attached to punches to permit a relatively short blank to be hydroformed in a relatively long hydroforming die assembly; and

FIG. 11 is a longitudinal section view of a hydroforming die assembly with a box-shaped punch and a round punch engaging opposite ends of a tubular blank.

#### DETAILED DESCRIPTION OF THE DRAWINGS

5            Shown generally in FIG. 1 is an exploded perspective view of a hydroforming die assembly generally indicated at 10 in accordance with the present invention. The hydroforming die assembly 10 includes a movable upper die structure 12, a movable lower die structure 14, a fixed die structure 16, and a fixed base 18 on which the fixed die structure 16 is mounted. A plurality of pneumatic or nitrogen spring cylinders 20 mount the lower die structure 14 for  
10            movement on the fixed base 18. The upper die structure 12, lower die structure 14, and fixed die structure 16 cooperate to define a longitudinal die cavity therebetween, having a substantially boxed-shaped or multifaceted cross section as will be described herein. Preferably, the upper die structure 12, lower die structure 14, fixed die structure 16, and fixed base 18 are each made of an appropriate steel material such as P-20 steel and/or 2714 steel.

15            As shown in FIG. 1, the upper die structure 12 defines a pair of cradle areas 22 at opposite longitudinal ends thereof. The cradle areas 22 are shaped and arranged to receive and accommodate upper clamping structures 26, at opposite longitudinal ends of the upper die structure 12. Particularly, the clamping structures 26 are each connected to the upper die structure 12 at the respective cradle areas 22, by a plurality of pneumatic or nitrogen spring  
20            cylinders 24 which permit relative vertical movement between the clamping structures 26 and the upper die structure 12.

             The lower die structure 14 has similar cradle areas 30 at opposite longitudinal ends thereof which are constructed and arranged to accommodate lower clamping structures 28 in a similar fashion. As shown, the longitudinal ends, indicated at 15, forming cradle area 30 of the  
25            lower die structure 14 have a generally U-shaped configuration.

The lower clamping structures 28 each have an upwardly facing surface 34 having a cross-sectional configuration that defines one-half of a multifaceted surface configuration. In the context of the present invention, the term multifaceted means square, rectangular, parallelepiped, polygonal, or any other closed, non-circular or oval configuration. In the illustrated embodiment, surface 34 defines one half of a rectangle.

In the embodiment shown, the upper two clamping structures 26 are substantially identical to the lower clamping structures 28 but are inverted with respect thereto. More particularly, each upper clamping structure 26, has a downwardly facing surface 36 having a cross-sectional configuration that defines a second half of the multifaceted (i.e., rectangular) surface configuration. The surface 36, of each clamping structure 26, cooperates with surface 34, of the respective lower clamping structures 28, to form a multifaceted clamping surface that captures end portions of a tubular blank 40 when the upper die structure 12 is lowered.

As can be appreciated from, for example, FIGS. 2, 3, and 4, the upper die structure 12 defines a longitudinal channel 38 having a substantially inverted U-shaped cross section. The channel 38 is defined by a downwardly facing, generally horizontal longitudinally extending surface 44, and a pair of spaced, longitudinally extending vertical side surfaces 43, which extend parallel to one another from opposite sides of surface 44.

The lower die structure 14 has a central opening 42 extending vertically therethrough, between the U-shaped longitudinal ends 15. The opening 42 receives fixed die structure 16. Interior vertical surfaces 41 in the lower die structure 14 define the aforementioned central opening 42. More particularly, a pair of longitudinally extending side surfaces 41, define the lateral extremities of the opening 42. The surfaces are vertically disposed in parallel facing relationship with one another. The U-shaped end portions 15 of the lower die structure 14 define the longitudinal extremities of the opening 42, and have interior surfaces (not shown) vertically disposed in parallel facing relation to one another.

The fixed base 18 is in the form of a substantially rectangular metal slab. The fixed die structure 16 is affixed to an upper surface 46 of the fixed base 18. The fixed die structure 16 is an elongate structure which extends along a major portion of the length of the upper surface 46 of the fixed base 18, generally along the center of the fixed base 18. The fixed die structure 16 projects upwardly from the fixed base 18 and has substantially vertical side surfaces 48 on opposite longitudinal sides thereof. The fixed die structure 16 is constructed and arranged to extend within the opening 42 in the lower die structure 14, with minimal clearance between the generally vertical side surfaces 48 of the fixed die structure and vertical surfaces 41 of the lower die structure 16. Similarly, there is minimal clearance between the interior transverse side surfaces (not shown) of end portions 15 of the lower die structure 14 and the vertical end surfaces 49 of the fixed die structure 16. The fixed die structure 16, further includes an upwardly facing, generally horizontal and longitudinally extending die surface 50, which is constructed and arranged to extend in spaced facing relation to the longitudinally extending, downwardly facing die surface 44 of the upper die structure 12.

As can best be seen in FIGs. 4 and 5, the aforementioned side surfaces 41, the upwardly facing surface 50, the side surfaces 43 and downwardly facing surface 44 cooperate to define a die cavity 52, having a multifaceted cross sectional configuration substantially throughout its longitudinal extent. The die cavity surfaces define the desired shape of a part to be hydroformed from a circular or oval blank tube.

FIG. 2 shows the upper die structure 12 in an opened or raised position. In this position the hydroforming die assembly 10 enables the tubular blank 40 to be placed within the lower die structure 14.

After the blank 40 is placed in the lower die structure 14, the upper die structure 12 is lowered to form the die cavity 52. The die cavity may be ultimately smaller than what is illustrated in FIG. 4 to effect a slight crushing of the tubular blank 40 before the blank 40 is



expanded in the hydroforming operation, as disclosed in U.S. Patent No. 5,987,950 to Horton, which is incorporated herein by reference. With the tubular blank 40 positioned between the closed upper die structure 12 and lower die structure 14, hydroforming rams 80 having punches 81 attached to mounting structures 90 are advanced from opposite sides of the hydroforming die assembly 10 to engage opposite ends of the tubular blank 40. As shown most clearly in FIGs. 6 and 7, each punch 81 includes an initial beveled portion 82 which transitions into a multifaceted, here rectangular, portion 84. A base 86 forming a lateral shoulder 88 is formed at one end of the multifaceted portion 84 opposite the initial beveled portion 82.

The punch 81 is secured to the end of the mounting structure 90 by means of mechanical fasteners 92, such as bolts, extending through counter-bored apertures 94 formed in the punch 81 and into the holder 92. Base 86 preferably has a size and shape that is complementary to the size and shape of the mounting structure 90 so as to form a smooth, uniform transition between the punch 81 and the mounting structure 90.

In the embodiment shown, the beveled portion 82 is preferably formed at an angle  $\theta$  (see Fig. 7) of between about 13-17°, and most preferably, about 15° with respect to the sides of the box-shaped portion 84. The multifaceted portion 84 preferably has straight sides so as to have a perimeter that defines a multifaceted shape, such as a polygon, square rectangle, skewed parallelogram, etc. The perimeter shape of the box-shaped portion 84 corresponds substantially to the shape of the clamping surface formed by the upwardly facing surface 34 of the lower clamping structure 28 and the downwardly facing surface 36 of the upper clamping structure 26. Also, the size of the multifaceted portion 84 is defined so as to provide a sealing interference fit with the wall of the tubular blank 40, with the clamping surfaces providing external support for blank 40.

The forward end 83 of the punch 81 at the free end of the beveled portion 82 has dimensions that are smaller than the multifaceted portion 84, thus permitting the forward end 83

to be inserted into the unexpanded end of the tubular blank 40 as shown in FIG. 2. With the forward end 83 of the punch 81 engaged with the end of the blank 40, the hydroforming ram can be further advanced under the force of hydraulic pressure, thus forcing the punch 81 into the end of the tubular blank 40 after the upper die structure 12 is lowered, as shown in FIG. 3. The beveled portion 82 of the punch 81 gradually forms the end of the blank 40 until the multifaceted portion 84 is fully inserted into the end of the blank 40. During this process, the end portions of blank 40 may be stretched outwardly as they are conformed to the multifaceted portion 84 and hence, the adjacent clamping surfaces 34, 36, as best shown in FIGs. 3 and 8. The width of the lateral shoulder 88 is preferably substantially the same as the thickness of the tubular blank 40 so that the outer surface of the tubular blank 40 transitions smoothly with the outer surfaces of the base 86 and the holder 90.

Thus, when the tube is formed over the punch to fit the finished tube shape it will not be necessary to remove the scrap portion of the blank, this eliminates the need for cut-off tooling, which saves money and time.

While the above description refers to only one punch, it should be appreciated that this discussion may apply to both punches 81 at opposite ends of the tube 40.

The tubular blank 40 may be round (circular cross section). Punches 81 have a similar height and width dimensions as the blank. The blank may be oval for punches that are rectangular or otherwise elongated along a height or width dimension. Hydroforming processes using oval tubular blanks are disclosed in U. S. Patent No. 5,987,950, the disclosure of which is hereby incorporated by reference, as stated above. Providing a tubular blank having an oval cross-section is advantageous in comparison with the conventional circular cross-section because it provides a circumference that conforms more closely to the final cross sectional perimeter of the generally box-shaped (not square) cross-sectional shaped die cavity 52. Thus, less expansion of the blank 40 is required when expanding the blank into conformity with the

surfaces forming cavity 52. In addition, the closer conformity of blank 40 and cavity surfaces allows the blank to be more easily expanded into the corners of the cavity 52, where expansion becomes most difficult due to the increasing frictional surface contact between the exterior surface of the blank and cavity surfaces during expansion of the blank 40.

5           As can be seen in FIG. 3, when the blank 40 is substantially rigidly held in place between die structures 12 and 14 and the hydroforming cylinders or rams 80 are telescopically and sealingly inserted into both opposite ends of the blank 40, so that beveled surfaces 82 engage the opposite edges of blank 40. The rams 80 are forced inwardly to cause the opposing edges of blank 40 to ride down surface 82 until it engages surface 88 and thus converts the end  
10   portions of the blank into the exterior shape of portion 84 of punch 81. The hydroforming cylinders then preferably pre-fill, but do not pressurize to any large extent, the tubular blank 40 with hydroforming fluid (preferably water) as indicated by reference character F. The hydraulic fluid is injected through a channel 87 formed in one or both punches 81 which communicates with a channel 97 formed in the corresponding mounting structure 90. Although the pre-filling  
15   operation is preferred to reduce cycle times, and to achieve a more smoothly contoured part, for some applications the upper die structure 12, may be fully lowered before any fluid is provided internally to tubular blank 40.

          End portions of the sealed die cavity 52 are generally rectangular in shape as defined by surface portions 54 having generally the same size and shape as the clamping surfaces 34,  
20   36 of the clamping structures 28, 26, respectively. Thus, the portions 54 define areas of the die cavity which have a cross-sectional area that is the same as or only slightly larger than the area defined by the cross-sectional shape of the end portions of the tubular member 40 after the punches 81 have been forced into the ends of the tubular member as illustrated in FIG. 6. Otherwise stated, the portions 54 of the die cavity 52 define areas of the die cavity which are  
25   used to expand the tubular blank 40 during the hydroforming process only to the extent

required to convert the shape of the blank from a round or oval cross section to a multifaceted (here rectangular) cross sectional configuration. Because the end portions of the blank 40 fitted with punches 81 (as illustrated in FIG. 6) will form the shape desired for the final part to be hydroformed, and will not constitute an unexpanded portion that must be cut off after the hydroforming process so that the remaining uncut portions of the tube correspond to the desired part, substantial scrap material is saved. Each unexpanded surface portion 54 of the die structure defines a shape consistent with the shape of the portions 84 and 86 of the punch 81.

The cavity 52 may also include an enlarged portion 56 towards the longitudinally central portions thereof. With the upper die structure 12 closed with respect to the lower die structure 14 and with the punches 81 sealingly inserted into the ends of the blank 40, the fluid F can be pressurized to expand the tubular blank 40 into conformity with the surfaces defining die cavity 52 (see FIGS. 5 and 9). The tubular blank 40 is expanded into the non-round, multifaceted (e.g., rectangular) of the die cavity 52. If the hydroforming assembly includes a die cavity with an enlarged portion 56, the blank 40 will be enlarged in that area. Because the portions 54 of die cavity 52 define shapes that are consistent with the shape of the multifaceted portion 84 of the punches 81, the hydroformed member has a consistent shape out to its ends, and it is not necessary to cut the end portions off. If a portion of the blank is to be significantly enlarged in its cross-sectional perimeter (e.g., greater than 5% relative to the original blank perimeter), it may be preferred that the longitudinal ends of the blank be pushed inwardly toward one another to replenish wall thickness as the blank is expanded. If the blank is not to be enlarged, but is only expanded into conformity with a multifaceted die cavity, longitudinal movement of the ends during expansion of the blank may not be necessary. More particulars on the preferred hydroforming process are disclosed in U.S. Patent No. 6,014,879 to Jaekel et al., the disclosure of which is hereby incorporated

by reference.

In accordance with another embodiment, if a significant amount of perimeter expansion is required at one end of the tube part so that substantial wall thickness replenishment is required thereat, it is generally preferred to employ a circular or oval punch, as opposed to a multifaceted punch. This is because material flows more effectively and evenly toward the enlargement area from a rounded end than from a box-shaped end. Such a hydroforming configuration is shown in FIG. 11, in which the surrounding die structures are not shown for clarity of the illustration. The arrangement shown includes one hydroforming ram 80 having a beveled, rectangular-shaped punch 81 and a rectangular-shaped mounting structure 90, as shown and described previously. The arrangement also includes a second hydroforming ram 100 that includes a cylindrical base portion 112 and a smaller cylindrical portion 102 with an insertion bevel 116 formed at the end. A circular, annular sealing shoulder 114 that engages the end of the tubular blank 40' is defined between base portion 112 and cylindrical portion 102.

At the end of the blank 40' engaged by the multifaceted punch 81, the die structure (not shown) presents a surface configuration that forms the blank 40' such that the cross sectional configuration at portion 110 of the blank is expanded only to the extent that the rounded cross section of the blank is converted to a multifaceted cross section. The portion 110 is joined by a gradually tapered segment 108 which extends to an enlarged rectangular-shaped cross sectional portion 106. Conversely, at the end of the blank 40' engaged by the cylindrical punch 100, the die structure presents a surface configuration that forms a relatively short, non-enlarged cylindrical portion 105 of the blank. The blank then transitions from the rounded perimeter shape at 105 to the rectangular cross section at area 106. The cylindrical punch 100 allows for the relatively large expansion of enlarged area 106 and the abrupt transition region 104 because longitudinal pushing at the end of the tubular member 40' is

more effective for replenishing wall thickness if the punch is round. The cylindrical end portion of the formed member shaped by the cylindrical punch 100 would typically be cut off during a subsequent finishing operation.

The box-shaped end formed by the rectangular-shaped punch 81, on the other hand,  
5 can be tailored to the desired final member shape so the end need not be cut off.

As shown in FIG. 10, one or more ram extenders 120 can be installed between the punch 81 and the holder 90. The extenders 120 have a rectangular-shaped cross sectional configuration that conforms with the rectangular-shaped cross sections of the mounting structure 90 and the base 86 of the punch 81. Accordingly, the hydroforming rams 80' can  
10 extend further into the relatively unenlarged portions 54 of the die cavity 52 to accommodate hydroforming of shorter tubular blanks 40' within the same die cavity 52. Of course, the extended hydroforming blanks 80' cannot extend to an enlarged area 56 of the hydroforming cavity 52 or the seal between the end of the tubular blank 40' and the shoulder 88 of the punch 81 will be lost as the tubular blank expands into the enlarged area 56.

15 Thus, the present invention includes a hydroforming die assembly for hydroforming a part from a tubular blank comprising a die structure having interior surfaces defining a die cavity, the die cavity having a cross sectional configuration conforming to the predetermined cross section of the part, the part having a predetermined configuration different from a configuration of the blank and including a predetermined cross section at one end thereof.

20 It should be appreciated that the foregoing detailed description and accompanying drawings of the preferred embodiments are merely illustrative in nature, and that the present invention includes all other embodiments that are within the spirit and scope of the described embodiments and appended claims.

What is claimed is:

1. A hydroforming die assembly for hydroforming a part from a tubular blank, said part having a desired configuration different from a configuration of said blank and including a desired cross section at one end thereof, said die assembly comprising:

5 a die structure having interior surfaces defining a die cavity, said die cavity having a cross sectional configuration conforming generally to the desired exterior shape of said part; and

a pair of tube-end engaging structures disposed at opposite ends of said die cavity and constructed and arranged to engage opposite ends of said tubular blank, said tube-end  
10 engaging structures being constructed and arranged to seal said opposite ends of said tubular blank and to pressurize hydroforming fluid within said tubular blank for expanding said tubular blank into conformity with said interior surfaces of said die cavity, a first of said tube-end engaging structures having an outer cross-sectional configuration corresponding to said  
15 desired cross section at said one end of said part, said first of said tube-engaging structures being movable into forced engagement with one end of said tubular blank to conform said one end of said tubular blank to said outer cross-sectional configuration of said first of said tube-engaging structures and hence said predetermined cross section at said one end of said part.

20 2. A hydroforming die assembly according to claim 1, wherein

said first tube-end engaging structure has an exterior surface including a beveled portion which is partially inserted into said one end of said tubular blank, said first tube-end engaging structure being moved further into said one end of said tubular blank so as to cause inner surface portions of said one end of said tubular blank to slide in forced relation along

25 said beveled portion and cause said one end of said tubular blank to be deformed i) over said

first tube-end engaging structure and ii) into conformity with said exterior surface of said first tube-end engaging structure, and wherein one end of said die cavity receives said first tube-engaging structure, said interior surfaces of said die cavity at said one end of said die cavity having a configuration conforming to an exterior surface configuration of said part at said one  
5 end of said part.

3. A method of producing a hydroformed part comprising the steps of:

providing a hydroforming die assembly for hydroforming a part from a tubular blank, the part having a desired configuration different from a configuration of the blank and

10 including a desired cross section at one end of the part, the die assembly including a die structure having interior surfaces defining a die cavity, the die cavity having a cross sectional configuration conforming to the desired cross section of the part, and a pair of tube-end engaging structures disposed at opposite ends of the die cavity and constructed and arranged to engage opposite ends of the tubular blank, the tube-end engaging structures being  
15 constructed and arranged to seal the opposite ends of the tubular blank and to pressurize hydroforming fluid within the tubular blank for expanding the tubular blank into conformity with the interior surfaces of the die cavity, a first of the tube-end engaging structures having an outer cross-sectional configuration corresponding to the desired cross section at one end of the part;

20 moving the first of the tube-engaging structures into forced engagement with one end of the tubular blank to conform the one end of said tubular blank to the outer cross-sectional configuration of the first of the tube-engaging structures and hence the predetermined cross section at the one end of the part; and

applying pressure within the tubular blank to form the tubular blank in to the desired  
25 configuration of the part.



4. A method according to claim 3, further comprising the step of:

incorporating the part into a product without cutting off the one end of the part formed by the forced engagement of the first of the tube-engaging structures.

5

5. A method of producing a hydroformed part comprising the steps of:

providing a hydroforming die assembly for hydroforming a part from a tubular blank,

the part having a desired configuration different from a configuration of the blank and

including a desired cross section at one end of the part, the die assembly including a die

10 structure having interior surfaces defining a die cavity, the die cavity having a cross sectional

configuration conforming to the desired cross section of the part, and a pair of tube-end

engaging structures disposed at opposite ends of the die cavity and constructed and arranged

to engage opposite ends of the tubular blank, the tube-end engaging structures being

constructed and arranged to seal the opposite ends of the tubular blank and to pressurize

15 hydroforming fluid within the tubular blank for expanding the tubular blank into conformity

with the interior surfaces of the die cavity;

applying pressure within the tubular blank to form the tubular blank in to the desired configuration of the part; and

incorporating the part into a product without cutting off the one end of the part formed

20 in the die cavity.

6. The method of claim 5, further comprising the step of:

moving the first of the tube-engaging structures into forced engagement with one end

of the tubular blank to conform the one end of said tubular blank to the outer cross-sectional

25 configuration of the first of the tube-engaging structures and hence the predetermined cross

section at the one end of the part.

7. A tool for expanding a tubular member, comprising:

a first portion having a perimeter formed by a plurality of sides, said perimeter

5 forming the desired inner shape of the tubular member; and

a beveled portion having a mating end coupled to said first portion, a free end

opposite to said mating end, a longitudinal axis, and a plurality of inclined surfaces positioned

between said mating end and said free end, each of said plurality of inclined surfaces

converging from said mating end toward said free end and toward said longitudinal axis, said

10 plurality of inclined surfaces being of the same number as said plurality of sides, and

each of said plurality of sides of said first portion being substantially parallel to said

longitudinal axis.

8. A tool according to claim 7, wherein

15 said plurality of sides is four sides and said plurality of surfaces is four surfaces.

9. A tool according to claim 8, wherein

said plurality of sides form a rectangle.

20 10. A tool according to claim 7, wherein

each of said plurality of surfaces of said beveled portion is inclined between

approximately 13 to 17 degrees relative to said longitudinal axis.

11. A tool according to claim 7, wherein

25 said first portion is coupled to a base having a shoulder directly adjacent said plurality

of sides around said perimeter of said first portion, said shoulder being substantially perpendicular to said longitudinal axis.

12. A tool according to claim 7, wherein

5 said free end of said beveled portion has an opening that extends completely through said beveled portion and said first portion.



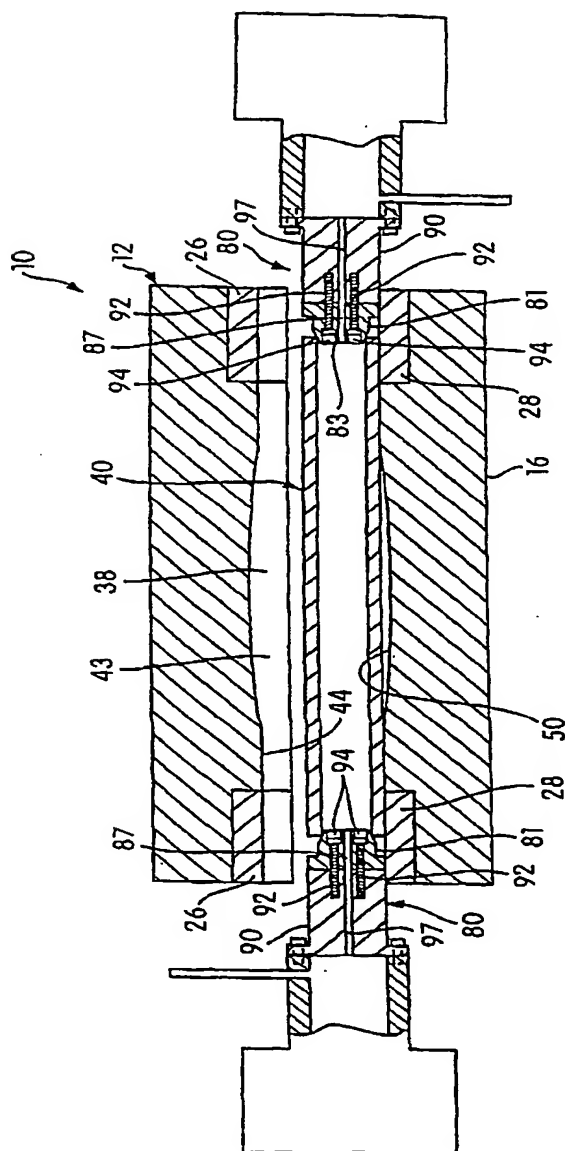


FIG. 2




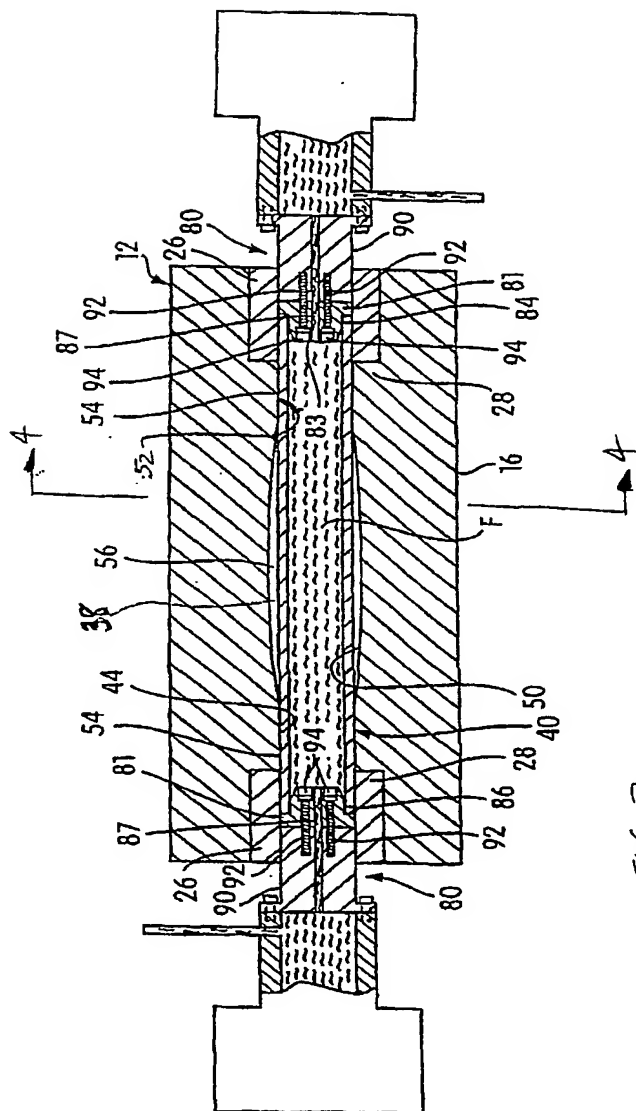


FIG. 3

4/9

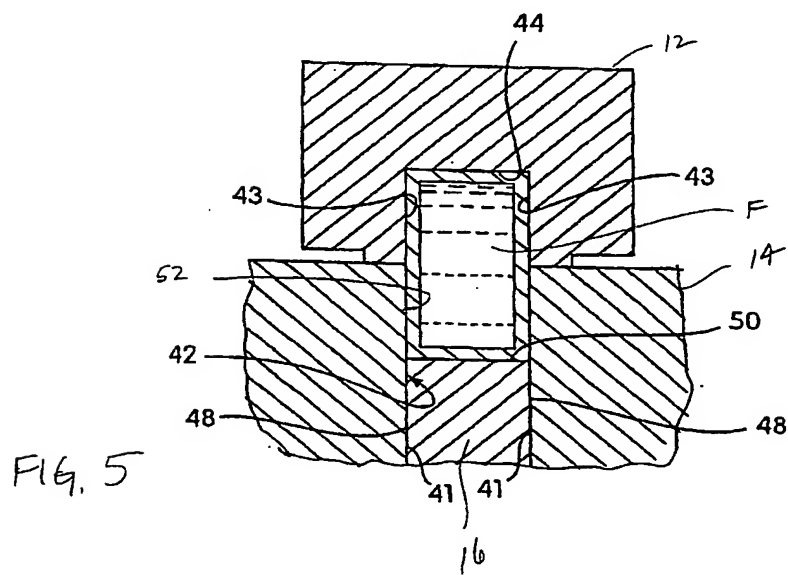

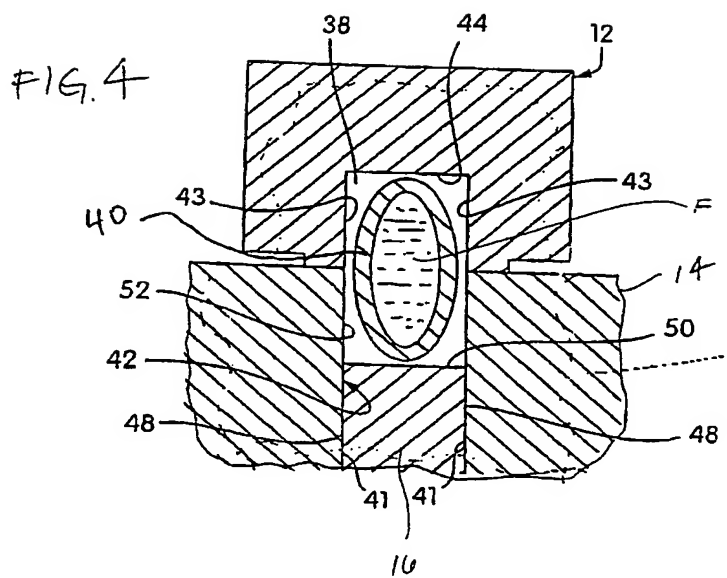

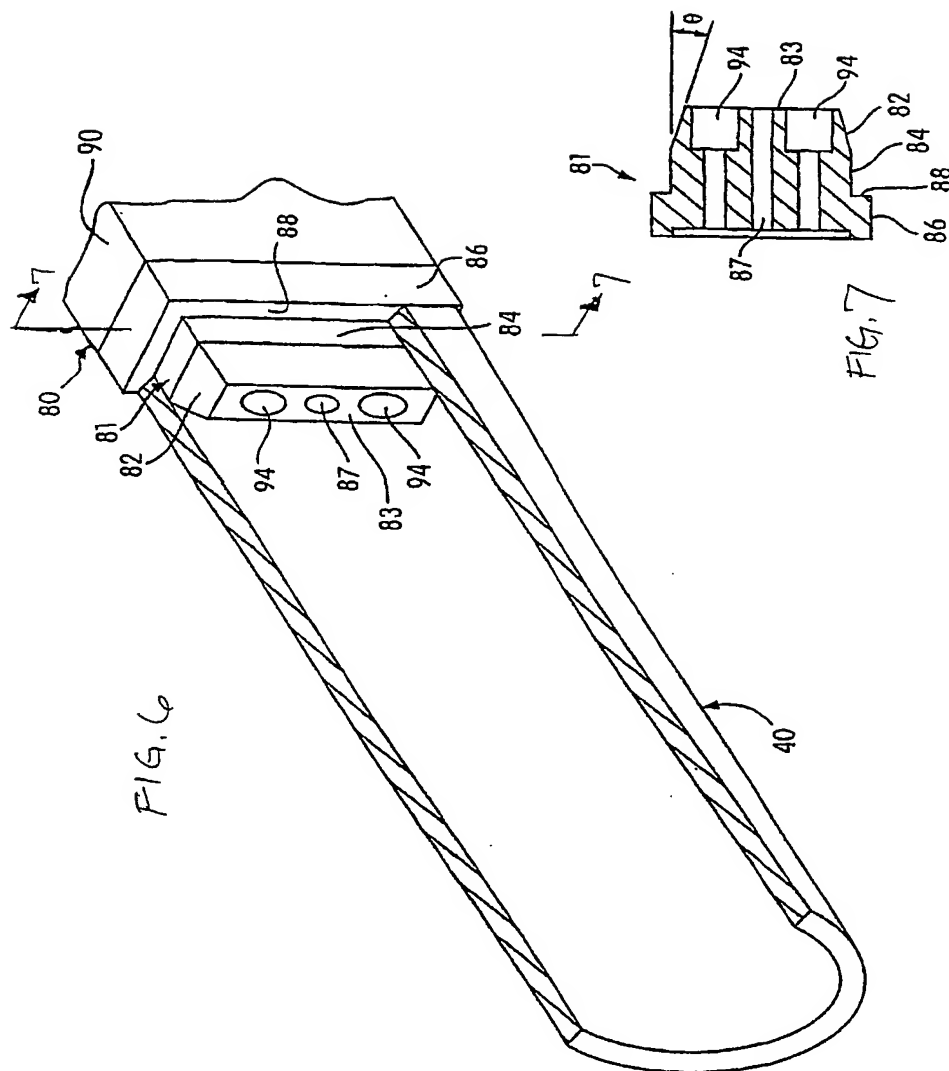

6/9

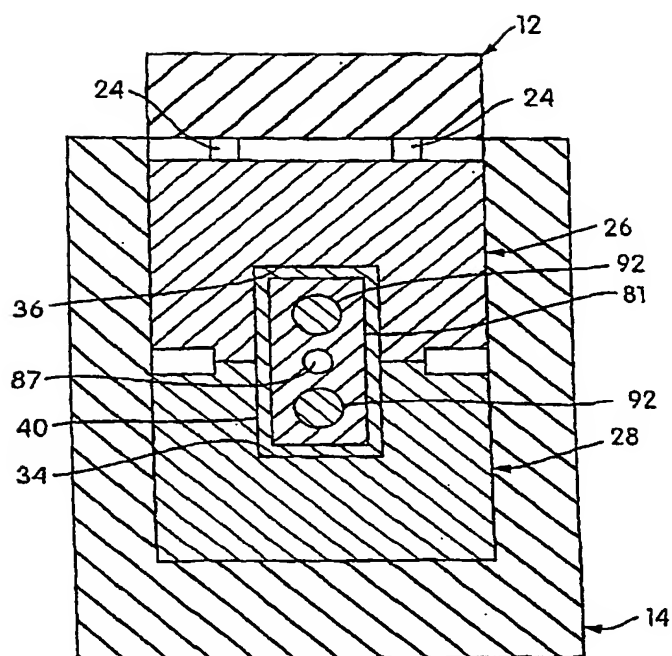


FIG. 8

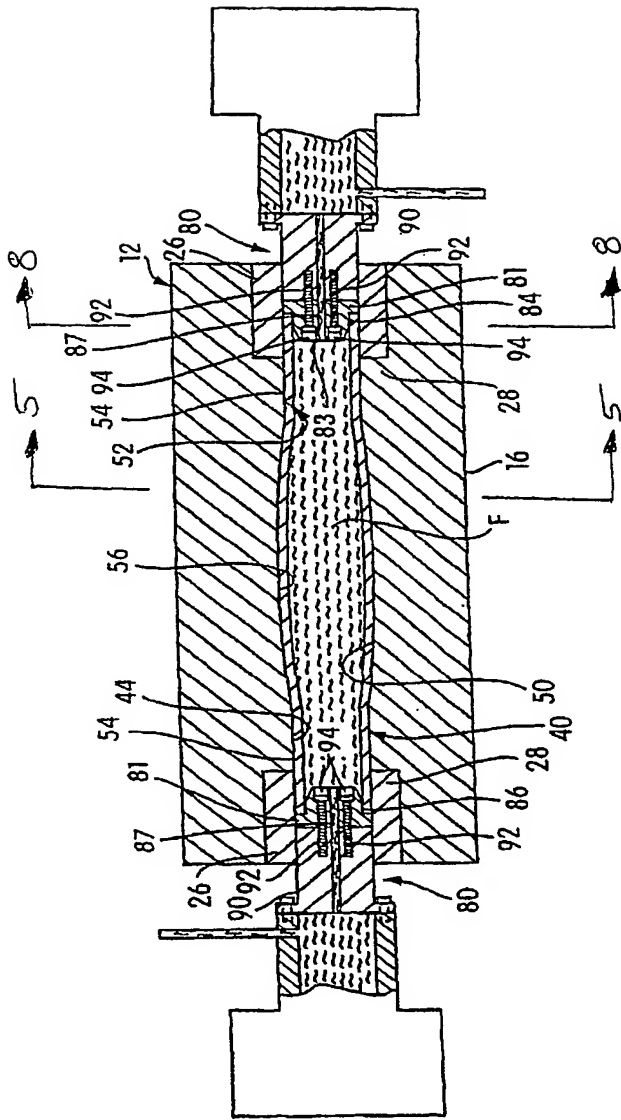


FIG. 9


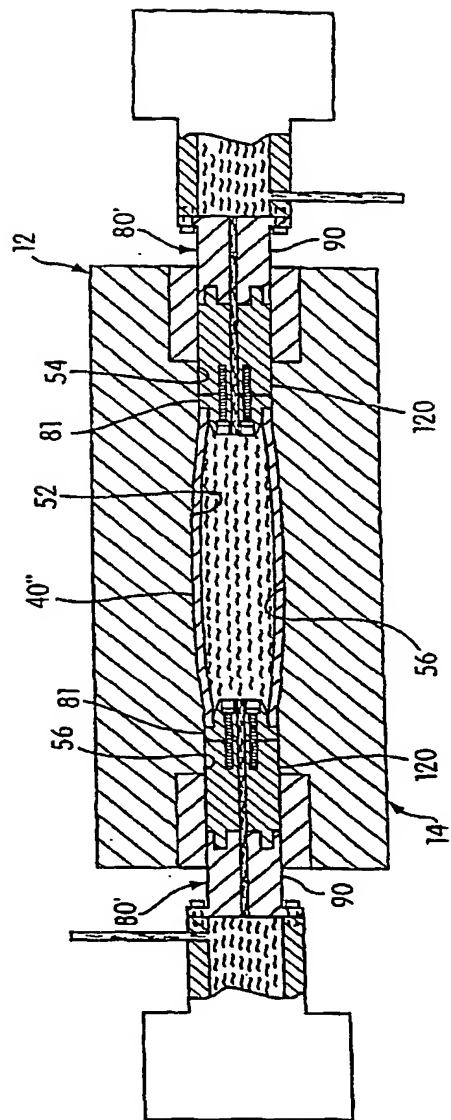


FIG. 10

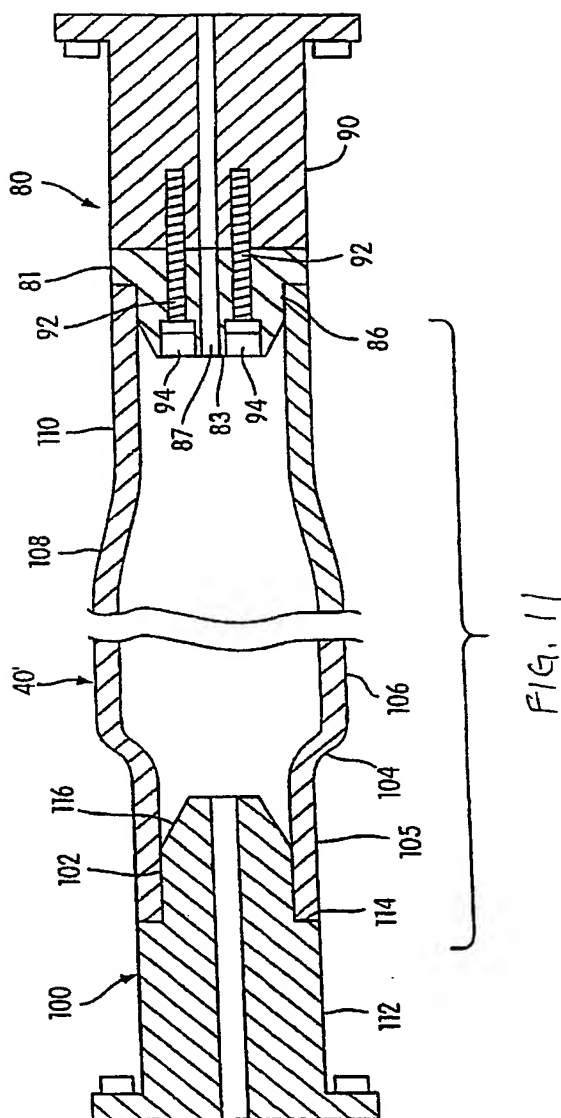

## INTERNATIONAL SEARCH REPORT

 International Application No  
 PCT/IB 01/01946

 A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 B21D26/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B21D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 022 073 A (NISSAN MOTOR) 26 July 2000 (2000-07-26) the whole document ---	1-12
X	WO 00 48761 A (MARKS LARRY DOUGLAS ; MORPHY GARY EARLE (CA); BESTARD THOMAS LLOYD) 24 August 2000 (2000-08-24) the whole document ---	1-12
X	US 5 735 156 A (ARAYA TAKESHI ET AL) 7 April 1998 (1998-04-07) the whole document ---	1-12
A	US 5 107 693 A (HANSEN RAINER ET AL) 28 April 1992 (1992-04-28) ---	
A	US 6 006 567 A (BROWN JAMES H ET AL) 28 December 1999 (1999-12-28) ---	
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

28 February 2002

Date of mailing of the international search report

06/03/2002

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax (+31-70) 340-3016

Authorized officer

Peeters, L

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 01/01946

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 170 557 A (RIGSBY DONALD R) 15 December 1992 (1992-12-15) ----	
A	US 4 761 982 A (SNYDER GEORGE K) 9 August 1988 (1988-08-09) ----	
A	US 5 475 911 A (DEHLINGER JAMES R ET AL) 19 December 1995 (1995-12-19) ----	
A	DE 198 33 006 A (MELEGHY HYDROFORMING GMBH & CO) 3 February 2000 (2000-02-03) -----	

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 01/01946

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1022073	A	26-07-2000	JP 2000202535 A EP 1022073 A1 US 6266986 B1	25-07-2000 26-07-2000 31-07-2001
WO 0048761	A	24-08-2000	US 6279364 B1 AU 2310400 A BR 0008234 A EP 1152843 A1 WO 0048761 A1	28-08-2001 04-09-2000 27-11-2001 14-11-2001 24-08-2000
US 5735156	A	07-04-1998	JP 8090097 A	09-04-1996
US 5107693	A	28-04-1992	DE 4017072 A1 ES 2044742 A1 GB 2244228 A , B	28-11-1991 01-01-1994 27-11-1991
US 6006567	A	28-12-1999	AU 3287197 A EP 1017516 A1 WO 9851428 A1	08-12-1998 12-07-2000 19-11-1998
US 5170557	A	15-12-1992	NONE	
US 4761982	A	09-08-1988	NONE	
US 5475911	A	19-12-1995	US 5363544 A AT 156396 T DE 69404757 D1 DE 69404757 T2 EP 0627272 A2 ES 2105523 T3 JP 2997909 B2 JP 6328158 A US 5582052 A US 5600983 A	15-11-1994 15-08-1997 11-09-1997 02-01-1998 07-12-1994 16-10-1997 11-01-2000 29-11-1994 10-12-1996 11-02-1997
DE 19833006	A	03-02-2000	DE 19833006 A1	03-02-2000

THIS PAGE BLANK (USPTO)



CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
25 April 2002 (25.04.2002)

PCT

(10) International Publication Number  
**WO 02/032596 A1**

(51) International Patent Classification<sup>7</sup>: **B21D 26/02**

(21) International Application Number: PCT/IB01/01946

(22) International Filing Date: 17 October 2001 (17.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/241,337 19 October 2000 (19.10.2000) US

(71) Applicant (for all designated States except US): **COSMA INTERNATIONAL INC.** [CA/CA]; 50 Casmir Court, Concord, Ontario L4K 4J5 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **COBB, Mark** [CA/CA]; 14583 Kennedy Road, R.R. #1, Inglewood, Ontario L0N 1K0 (CA). **GENSEBERGER, Erich** [AT/CA]; 21 Keily Crescent, Bolton, Ontario L7E 5S1 (CA).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR HYDROFORMING A TUBULAR PART

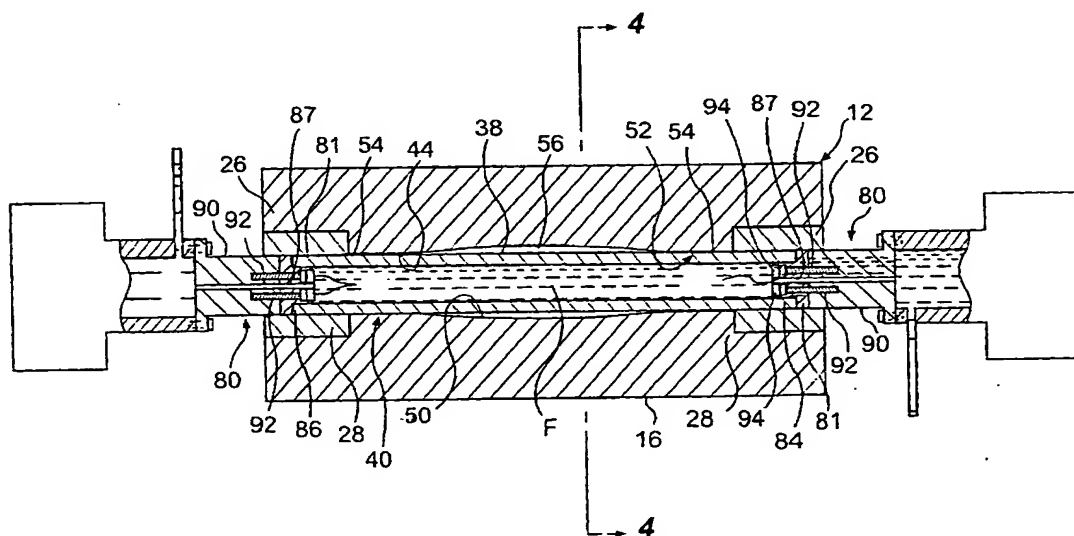

(57) Abstract: A method and apparatus for shaping a raw tube (40) into a formed part. The part can be configured within a die assembly including a hydroforming die structure (12, 14) and a pair of tube-engaging punches (81). The punches are inserted into the ends of the raw tube to shape the ends into the desired configuration. The middle portion of the raw tube is shaped into the desired configuration by hydroforming. Thus, the method and apparatus can shape the raw tube along its entire length, leaving no remnants of the raw tube that must be trimmed away.

WO 02/032596 A1



(48) Date of publication of this corrected version:

24 October 2002

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(15) Information about Correction:

see PCT Gazette No. 43/2002 of 24 October 2002, Section II

CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
25 April 2002 (25.04.2002)

PCT

(10) International Publication Number  
**WO 02/032596 A1**

(51) International Patent Classification<sup>7</sup>: **B21D 26/02**

(21) International Application Number: PCT/IB01/01946

(22) International Filing Date: 17 October 2001 (17.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/241,337 19 October 2000 (19.10.2000) US

(71) Applicant (for all designated States except US): **COSMA INTERNATIONAL INC.** [CA/CA]; 50 Casmir Court, Concord, Ontario L4K 4J5 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **COBB, Mark** [CA/CA]; 14583 Kennedy Road, R.R. #1, Inglewood, Ontario L0N 1K0 (CA). **GENSEBERGER, Erich** [AT/CA]; 21 Keily Crescent, Bolton, Ontario L7E 5S1 (CA).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


— with international search report

(48) Date of publication of this corrected version:

28 August 2003

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR HYDROFORMING A TUBULAR PART

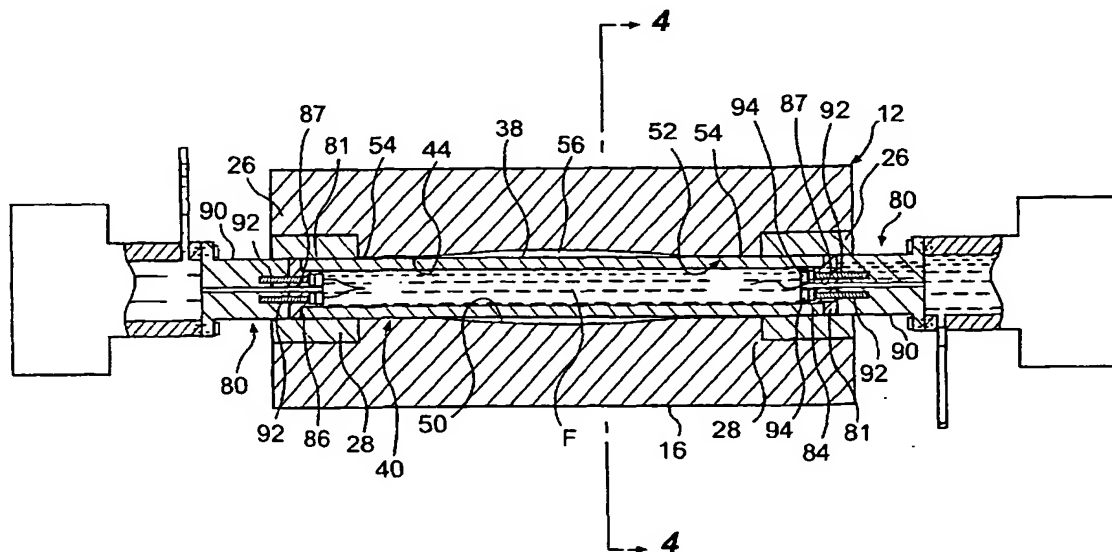

(57) Abstract: A method and apparatus for shaping a raw tube (40) into a formed part. The part can be configured within a die assembly including a hydroforming die structure (12, 14) and a pair of tube-engaging punches (81). The punches are inserted into the ends of the raw tube to shape the ends into the desired configuration. The middle portion of the raw tube is shaped into the desired configuration by hydroforming. Thus, the method and apparatus can shape the raw tube along its entire length, leaving no remnants of the raw tube that must be trimmed away.



**(15) Information about Corrections:**

see PCT Gazette No. 35/2003 of 28 August 2003, Section II

**Previous Correction:**

see PCT Gazette No. 43/2002 of 24 October 2002, Section II

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**APPARATUS AND METHOD FOR HYDROFORMING A TUBULAR PART**

This application claims the benefit of U.S. Provisional Application No. 60/241,337,  
filed on October 19, 2000, the entire contents of which are incorporated herein by reference  
5 thereto.

**FIELD OF THE INVENTION**

The invention relates generally to an improved apparatus and method for more  
efficiently hydroforming a tubular part. More specifically, the invention relates to an apparatus  
10 and method that uses a punch to shape each end of the part into the desired configuration and  
hold the part during hydroforming.

**BACKGROUND OF THE INVENTION**

Typically, to form a tubular part by hydroforming, a raw tube is positioned within a  
15 hydroforming tool and the tube is secured at its ends. The middle portion of the raw tube is then  
subjected to hydroforming, leaving a transitional zone between the ends of the raw tube and the  
hydroformed middle portion. The hydroformed part is then finished by having the two  
transition zones removed from the tube, leaving only the fully hydroformed middle portion.

This process of removing the ends of the hydroformed part creates inefficiencies. For  
20 example, the ends that are cut away from the finished part become wasted raw material. Also,  
the step of cutting away the ends requires additional cutting tools, which complicates the  
apparatus needed to create the finished part. Further, time is wasted since completion of the  
finished part requires the added step of cutting off the transitional zones at each end.

Some examples of hydroforming are found in the U.S. Patent Nos. 5,987,950 to Horton  
25 and 6,014,950 to Jaekel et al.

SUMMARY OF THE INVENTION

One object of the present invention is to provide an improved apparatus and method for forming a hollow part.

Another object of the present invention is to provide an improved apparatus and method  
5 for efficiently and cost effectively shaping a hollow part by mechanically shaping at least one end of the part and by hydroforming a portion of the part.

Still another object of the invention is to provide an apparatus and method for forming a part that uses a punch to secure each end of the part while the punch shapes the end so that each end has the same configuration as a hydroformed, middle portion.

10 The forgoing objects are basically attained by providing a hydroforming die assembly for hydroforming a part from a tubular blank, the part having a desired configuration different from a configuration of the blank and including a desired cross section at one end thereof, the die assembly comprising: a die structure having interior surfaces defining a die cavity, the die cavity having a cross sectional configuration conforming to the desired cross section of the  
15 part; and a pair of tube-end engaging structures disposed at opposite ends of the die cavity and constructed and arranged to engage opposite ends of the tubular blank, the tube-end engaging structures being constructed and arranged to seal the opposite ends of the tubular blank and to pressurize hydroforming fluid within the tubular blank for expanding the tubular blank into conformity with the interior surfaces of the die cavity, a first of the tube-end  
20 engaging structures having an outer cross-sectional configuration corresponding to the desired cross section at one end of the part, the first of the tube-engaging structures being movable into forced engagement with one end of the tubular blank to conform the one end of the tubular blank to the outer cross-sectional configuration of the first of the tube-engaging structures and hence the predetermined cross section at the one end of the part.

25 The forgoing objects are also attained by providing a method of forming a

hydroformed part comprising the steps of: providing a hydroforming die assembly for hydroforming a part from a tubular blank, the part having a desired configuration different from a configuration of the blank and including a desired cross section at one end of the part, the die assembly including a die structure having interior surfaces defining a die cavity, the die cavity having a cross sectional configuration conforming to the desired cross section of the part, and a pair of tube-end engaging structures disposed at opposite ends of the die cavity and constructed and arranged to engage opposite ends of the tubular blank, the tube-end engaging structures being constructed and arranged to seal the opposite ends of the tubular blank and to pressurize hydroforming fluid within the tubular blank for expanding the tubular blank into conformity with the interior surfaces of the die cavity, a first of the tube-end engaging structures having an outer cross-sectional configuration corresponding to the desired cross section at one end of the part; moving the first of the tube-engaging structures into forced engagement with one end of the tubular blank to conform the one end of the tubular blank to the outer cross-sectional configuration of the first of the tube-engaging structures and hence the predetermined cross section at the one end of the part; and applying pressure within the tubular blank to form the tubular blank in to the desired configuration of the part.

Other objects, advantages, and features of the invention will become apparent from the following detailed description, appended drawings, and claims.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an exploded perspective view showing upper and lower die structures and box-shaped punches of a hydroforming die assembly in accordance with the principles of the present invention;

FIG. 2 is a longitudinal section view of the hydroforming die assembly along section line 1-1 in FIG. 1, and including a tubular blank positioned within the lower die structure, the

upper die structure shown in the raised or fully open position, and box-shaped punches engaging the ends of the tubular blank;

FIG. 3 is a longitudinal sectional view of the hydroforming die assembly, similar to FIG. 2, but showing the upper die structure in a fully lowered position, with the tubular blank positioned within the lower die structure, the box-shaped punches inserted into the ends of the tubular blank, and fluid injected into the tubular blank;

FIG. 4 is a cross-section taken through section line 4-4 in FIG. 3 and showing an unexpanded oval tubular blank disposed within the hydroforming assembly and filled with hydroforming fluid;

FIG. 5 is a cross-section taken through line 5-5 in FIG. 9 showing the tubular blank expanded by fluid under pressure within the expansion region of the cooperating upper and lower hydroforming dies;

FIG. 6 is a partial perspective view, partially in cross-section, of a box-shaped punch engaging a tubular blank;

FIG. 7 is a longitudinal sectional view taken through line 7-7 in FIG. 6 showing a box-shaped punch;

FIG. 8 is a cross-sectional view along section line 8-8 in FIG. 9 showing the end of the tubular blank between upper and lower clamping structures with a box-shaped punch inserted therein;

FIG. 9 is a longitudinal section view showing a hydroforming step wherein the upper die structure is in the fully lowered position and a tubular blank has been hydroformed into an expanded configuration by fluid under pressure;

FIG. 10 is a longitudinal section view showing the use of hydroforming ram extenders attached to punches to permit a relatively short blank to be hydroformed in a relatively long hydroforming die assembly; and



FIG. 11 is a longitudinal section view of a hydroforming die assembly with a box-shaped punch and a round punch engaging opposite ends of a tubular blank.

#### DETAILED DESCRIPTION OF THE DRAWINGS

5 Shown generally in FIG. 1 is an exploded perspective view of a hydroforming die assembly generally indicated at 10 in accordance with the present invention. The hydroforming die assembly 10 includes a movable upper die structure 12, a movable lower die structure 14, a fixed die structure 16, and a fixed base 18 on which the fixed die structure 16 is mounted. A plurality of pneumatic or nitrogen spring cylinders 20 mount the lower die structure 14 for  
10 movement on the fixed base 18. The upper die structure 12, lower die structure 14, and fixed die structure 16 cooperate to define a longitudinal die cavity therebetween, having a substantially boxed-shaped or multifaceted cross section as will be described herein. Preferably, the upper die structure 12, lower die structure 14, fixed die structure 16, and fixed base 18 are each made of an appropriate steel material such as P-20 steel and/or 2714 steel.

15 As shown in FIG. 1, the upper die structure 12 defines a pair of cradle areas 22 at opposite longitudinal ends thereof. The cradle areas 22 are shaped and arranged to receive and accommodate upper clamping structures 26, at opposite longitudinal ends of the upper die structure 12. Particularly, the clamping structures 26 are each connected to the upper die structure 12 at the respective cradle areas 22, by a plurality of pneumatic or nitrogen spring  
20 cylinders 24 which permit relative vertical movement between the clamping structures 26 and the upper die structure 12.

The lower die structure 14 has similar cradle areas 30 at opposite longitudinal ends thereof which are constructed and arranged to accommodate lower clamping structures 28 in a similar fashion. As shown, the longitudinal ends, indicated at 15, forming cradle area 30 of the  
25 lower die structure 14 have a generally U-shaped configuration.

The lower clamping structures 28 each have an upwardly facing surface 34 having a cross-sectional configuration that defines one-half of a multifaceted surface configuration. In the context of the present invention, the term multifaceted means square, rectangular, parallelepiped, polygonal, or any other closed, non-circular or oval configuration. In the  
5 illustrated embodiment, surface 34 defines one half of a rectangle.

In the embodiment shown, the upper two clamping structures 26 are substantially identical to the lower clamping structures 28 but are inverted with respect thereto. More particularly, each upper clamping structure 26, has a downwardly facing surface 36 having a cross-sectional configuration that defines a second half of the multifaceted (i.e., rectangular)  
10 surface configuration. The surface 36, of each clamping structure 26, cooperates with surface 34, of the respective lower clamping structures 28, to form a multifaceted clamping surface that captures end portions of a tubular blank 40 when the upper die structure 12 is lowered.

As can be appreciated from, for example, FIGS. 2, 3, and 4, the upper die structure 12 defines a longitudinal channel 38 having a substantially inverted U-shaped cross section. The  
15 channel 38 is defined by a downwardly facing, generally horizontal longitudinally extending surface 44, and a pair of spaced, longitudinally extending vertical side surfaces 43, which extend parallel to one another from opposite sides of surface 44.

The lower die structure 14 has a central opening 42 extending vertically therethrough, between the U-shaped longitudinal ends 15. The opening 42 receives fixed die structure 16.  
20 Interior vertical surfaces 41 in the lower die structure 14 define the aforementioned central opening 42. More particularly, a pair of longitudinally extending side surfaces 41, define the lateral extremities of the opening 42. The surfaces are vertically disposed in parallel facing relationship with one another. The U-shaped end portions 15 of the lower die structure 14 define the longitudinal extremities of the opening 42, and have interior surfaces (not shown)  
25 vertically disposed in parallel facing relation to one another.

The fixed base 18 is in the form of a substantially rectangular metal slab. The fixed die structure 16 is affixed to an upper surface 46 of the fixed base 18. The fixed die structure 16 is an elongate structure which extends along a major portion of the length of the upper surface 46 of the fixed base 18, generally along the center of the fixed base 18. The fixed die structure 16 projects upwardly from the fixed base 18 and has substantially vertical side surfaces 48 on opposite longitudinal sides thereof. The fixed die structure 16 is constructed and arranged to extend within the opening 42 in the lower die structure 14, with minimal clearance between the generally vertical side surfaces 48 of the fixed die structure and vertical surfaces 41 of the lower die structure 16. Similarly, there is minimal clearance between the interior transverse side surfaces (not shown) of end portions 15 of the lower die structure 14 and the vertical end surfaces 49 of the fixed die structure 16. The fixed die structure 16, further includes an upwardly facing, generally horizontal and longitudinally extending die surface 50, which is constructed and arranged to extend in spaced facing relation to the longitudinally extending, downwardly facing die surface 44 of the upper die structure 12.

As can best be seen in FIGs. 4 and 5, the aforementioned side surfaces 41, the upwardly facing surface 50, the side surfaces 43 and downwardly facing surface 44 cooperate to define a die cavity 52, having a multifaceted cross sectional configuration substantially throughout its longitudinal extent. The die cavity surfaces define the desired shape of a part to be hydroformed from a circular or oval blank tube.

FIG. 2 shows the upper die structure 12 in an opened or raised position. In this position the hydroforming die assembly 10 enables the tubular blank 40 to be placed within the lower die structure 14.

After the blank 40 is placed in the lower die structure 14, the upper die structure 12 is lowered to form the die cavity 52. The die cavity may be ultimately smaller than what is illustrated in FIG. 4 to effect a slight crushing of the tubular blank 40 before the blank 40 is

expanded in the hydroforming operation, as disclosed in U.S. Patent No. 5,987,950 to Horton, which is incorporated herein by reference. With the tubular blank 40 positioned between the closed upper die structure 12 and lower die structure 14, hydroforming rams 80 having punches 81 attached to mounting structures 90 are advanced from opposite sides of the hydroforming die assembly 10 to engage opposite ends of the tubular blank 40. As shown most clearly in FIGs. 6 and 7, each punch 81 includes an initial beveled portion 82 which transitions into a multifaceted, here rectangular, portion 84. A base 86 forming a lateral shoulder 88 is formed at one end of the multifaceted portion 84 opposite the initial beveled portion 82.

The punch 81 is secured to the end of the mounting structure 90 by means of mechanical fasteners 92, such as bolts, extending through counter-bored apertures 94 formed in the punch 81 and into the holder 92. Base 86 preferably has a size and shape that is complementary to the size and shape of the mounting structure 90 so as to form a smooth, uniform transition between the punch 81 and the mounting structure 90.

In the embodiment shown, the beveled portion 82 is preferably formed at an angle  $\theta$  (see Fig. 7) of between about 13-17°, and most preferably, about 15° with respect to the sides of the box-shaped portion 84. The multifaceted portion 84 preferably has straight sides so as to have a perimeter that defines a multifaceted shape, such as a polygon, square rectangle, skewed parallelogram, etc. The perimeter shape of the box-shaped portion 84 corresponds substantially to the shape of the clamping surface formed by the upwardly facing surface 34 of the lower clamping structure 28 and the downwardly facing surface 36 of the upper clamping structure 26. Also, the size of the multifaceted portion 84 is defined so as to provide a sealing interference fit with the wall of the tubular blank 40, with the clamping surfaces providing external support for blank 40.

The forward end 83 of the punch 81 at the free end of the beveled portion 82 has dimensions that are smaller than the multifaceted portion 84, thus permitting the forward end 83

to be inserted into the unexpanded end of the tubular blank 40 as shown in FIG. 2. With the forward end 83 of the punch 81 engaged with the end of the blank 40, the hydroforming ram can be further advanced under the force of hydraulic pressure, thus forcing the punch 81 into the end of the tubular blank 40 after the upper die structure 12 is lowered, as shown in FIG. 3. The  
5 beveled portion 82 of the punch 81 gradually forms the end of the blank 40 until the multifaceted portion 84 is fully inserted into the end of the blank 40. During this process, the end portions of blank 40 may be stretched outwardly as they are conformed to the multifaceted portion 84 and hence, the adjacent clamping surfaces 34, 36, as best shown in FIGs. 3 and 8. The width of the lateral shoulder 88 is preferably substantially the same as the thickness of the  
10 tubular blank 40 so that the outer surface of the tubular blank 40 transitions smoothly with the outer surfaces of the base 86 and the holder 90.

Thus, when the tube is formed over the punch to fit the finished tube shape it will not be necessary to remove the scrap portion of the blank, this eliminates the need for cut-off tooling, which saves money and time.

15 While the above description refers to only one punch, it should be appreciated that this discussion may apply to both punches 81 at opposite ends of the tube 40.

The tubular blank 40 may be round (circular cross section). Punches 81 have a similar height and width dimensions as the blank. The blank may be oval for punches that are rectangular or otherwise elongated along a height or width dimension. Hydroforming processes  
20 using oval tubular blanks are disclosed in U. S. Patent No. 5,987,950, the disclosure of which is hereby incorporated by reference, as stated above. Providing a tubular blank having an oval cross-section is advantageous in comparison with the conventional circular cross-section because it provides a circumference that conforms more closely to the final cross sectional perimeter of the generally box-shaped (not square) cross-sectional shaped die cavity 52. Thus,  
25 less expansion of the blank 40 is required when expanding the blank into conformity with the

surfaces forming cavity 52. In addition, the closer conformity of blank 40 and cavity surfaces allows the blank to be more easily expanded into the corners of the cavity 52, where expansion becomes most difficult due to the increasing frictional surface contact between the exterior surface of the blank and cavity surfaces during expansion of the blank 40.

5 As can be seen in FIG. 3, when the blank 40 is substantially rigidly held in place between die structures 12 and 14 and the hydroforming cylinders or rams 80 are telescopically and sealingly inserted into both opposite ends of the blank 40, so that beveled surfaces 82 engage the opposite edges of blank 40. The rams 80 are forced inwardly to cause the opposing edges of blank 40 to ride down surface 82 until it engages surface 88 and thus converts the end  
10 portions of the blank into the exterior shape of portion 84 of punch 81. The hydroforming cylinders then preferably pre-fill, but do not pressurize to any large extent, the tubular blank 40 with hydroforming fluid (preferably water) as indicated by reference character F. The hydraulic fluid is injected through a channel 87 formed in one or both punches 81 which communicates with a channel 97 formed in the corresponding mounting structure 90. Although the pre-filling  
15 operation is preferred to reduce cycle times, and to achieve a more smoothly contoured part, for some applications the upper die structure 12, may be fully lowered before any fluid is provided internally to tubular blank 40.

End portions of the sealed die cavity 52 are generally rectangular in shape as defined by surface portions 54 having generally the same size and shape as the clamping surfaces 34,  
20 36 of the clamping structures 28, 26, respectively. Thus, the portions 54 define areas of the die cavity which have a cross-sectional area that is the same as or only slightly larger than the area defined by the cross-sectional shape of the end portions of the tubular member 40 after the punches 81 have been forced into the ends of the tubular member as illustrated in FIG. 6. Otherwise stated, the portions 54 of the die cavity 52 define areas of the die cavity which are  
25 used to expand the tubular blank 40 during the hydroforming process only to the extent

required to convert the shape of the blank from a round or oval cross section to a multifaceted (here rectangular) cross sectional configuration. Because the end portions of the blank 40 fitted with punches 81 (as illustrated in FIG. 6) will form the shape desired for the final part to be hydroformed, and will not constitute an unexpanded portion that must be cut off after the hydroforming process so that the remaining uncut portions of the tube correspond to the desired part, substantial scrap material is saved. Each unexpanded surface portion 54 of the die structure defines a shape consistent with the shape of the portions 84 and 86 of the punch 81.

The cavity 52 may also include an enlarged portion 56 towards the longitudinally central portions thereof. With the upper die structure 12 closed with respect to the lower die structure 14 and with the punches 81 sealingly inserted into the ends of the blank 40, the fluid F can be pressurized to expand the tubular blank 40 into conformity with the surfaces defining die cavity 52 (see FIGS. 5 and 9). The tubular blank 40 is expanded into the non-round, multifaceted (e.g., rectangular) of the die cavity 52. If the hydroforming assembly includes a die cavity with an enlarged portion 56, the blank 40 will be enlarged in that area. Because the portions 54 of die cavity 52 define shapes that are consistent with the shape of the multifaceted portion 84 of the punches 81, the hydroformed member has a consistent shape out to its ends, and it is not necessary to cut the end portions off. If a portion of the blank is to be significantly enlarged in its cross-sectional perimeter (e.g., greater than 5% relative to the original blank perimeter), it may be preferred that the longitudinal ends of the blank be pushed inwardly toward one another to replenish wall thickness as the blank is expanded. If the blank is not to be enlarged, but is only expanded into conformity with a multifaceted die cavity, longitudinal movement of the ends during expansion of the blank may not be necessary. More particulars on the preferred hydroforming process are disclosed in U.S. Patent No. 6,014,879 to Jaekel et al., the disclosure of which is hereby incorporated

by reference.

In accordance with another embodiment, if a significant amount of perimeter expansion is required at one end of the tube part so that substantial wall thickness replenishment is required thereat, it is generally preferred to employ a circular or oval punch, as opposed to a multifaceted punch. This is because material flows more effectively and evenly toward the enlargement area from a rounded end than from a box-shaped end. Such a hydroforming configuration is shown in FIG. 11, in which the surrounding die structures are not shown for clarity of the illustration. The arrangement shown includes one hydroforming ram 80 having a beveled, rectangular-shaped punch 81 and a rectangular-shaped mounting structure 90, as shown and described previously. The arrangement also includes a second hydroforming ram 100 that includes a cylindrical base portion 112 and a smaller cylindrical portion 102 with an insertion bevel 116 formed at the end. A circular, annular sealing shoulder 114 that engages the end of the tubular blank 40' is defined between base portion 112 and cylindrical portion 102.

At the end of the blank 40' engaged by the multifaceted punch 81, the die structure (not shown) presents a surface configuration that forms the blank 40' such that the cross sectional configuration at portion 110 of the blank is expanded only to the extent that the rounded cross section of the blank is converted to a multifaceted cross section. The portion 110 is joined by a gradually tapered segment 108 which extends to an enlarged rectangular-shaped cross sectional portion 106. Conversely, at the end of the blank 40' engaged by the cylindrical punch 100, the die structure presents a surface configuration that forms a relatively short, non-enlarged cylindrical portion 105 of the blank. The blank then transitions from the rounded perimeter shape at 105 to the rectangular cross section at area 106. The cylindrical punch 100 allows for the relatively large expansion of enlarged area 106 and the abrupt transition region 104 because longitudinal pushing at the end of the tubular member 40' is



more effective for replenishing wall thickness if the punch is round. The cylindrical end portion of the formed member shaped by the cylindrical punch 100 would typically be cut off during a subsequent finishing operation.

The box-shaped end formed by the rectangular-shaped punch 81, on the other hand,  
5 can be tailored to the desired final member shape so the end need not be cut off.

As shown in FIG. 10, one or more ram extenders 120 can be installed between the punch 81 and the holder 90. The extenders 120 have a rectangular-shaped cross sectional configuration that conforms with the rectangular-shaped cross sections of the mounting structure 90 and the base 86 of the punch 81. Accordingly, the hydroforming rams 80' can  
10 extend further into the relatively unenlarged portions 54 of the die cavity 52 to accommodate hydroforming of shorter tubular blanks 40' within the same die cavity 52. Of course, the extended hydroforming blanks 80' cannot extend to an enlarged area 56 of the hydroforming cavity 52 or the seal between the end of the tubular blank 40' and the shoulder 88 of the punch 81 will be lost as the tubular blank expands into the enlarged area 56.

15 Thus, the present invention includes a hydroforming die assembly for hydroforming a part from a tubular blank comprising a die structure having interior surfaces defining a die cavity, the die cavity having a cross sectional configuration conforming to the predetermined cross section of the part, the part having a predetermined configuration different from a configuration of the blank and including a predetermined cross section at one end thereof.

20 It should be appreciated that the foregoing detailed description and accompanying drawings of the preferred embodiments are merely illustrative in nature, and that the present invention includes all other embodiments that are within the spirit and scope of the described embodiments and appended claims.

What is claimed is:

1. A hydroforming die assembly for hydroforming a part from a tubular blank, said part having a desired configuration different from a configuration of said blank and including a desired cross section at one end thereof, said die assembly comprising:

5 a die structure having interior surfaces defining a die cavity, said die cavity having a cross sectional configuration conforming generally to the desired exterior shape of said part; and

a pair of tube-end engaging structures disposed at opposite ends of said die cavity and constructed and arranged to engage opposite ends of said tubular blank, said tube-end  
10 engaging structures being constructed and arranged to seal said opposite ends of said tubular blank and to pressurize hydroforming fluid within said tubular blank for expanding said tubular blank into conformity with said interior surfaces of said die cavity, a first of said tube-end engaging structures having an outer cross-sectional configuration corresponding to said desired cross section at said one end of said part, said first of said tube-engaging structures  
15 being movable into forced engagement with one end of said tubular blank to conform said one end of said tubular blank to said outer cross-sectional configuration of said first of said tube-engaging structures and hence said predetermined cross section at said one end of said part.

20 2. A hydroforming die assembly according to claim 1, wherein

said first tube-end engaging structure has an exterior surface including a beveled portion which is partially inserted into said one end of said tubular blank, said first tube-end engaging structure being moved further into said one end of said tubular blank so as to cause inner surface portions of said one end of said tubular blank to slide in forced relation along  
25 said beveled portion and cause said one end of said tubular blank to be deformed i) over said

first tube-end engaging structure and ii) into conformity with said exterior surface of said first tube-end engaging structure, and wherein one end of said die cavity receives said first tube-engaging structure, said interior surfaces of said die cavity at said one end of said die cavity having a configuration conforming to an exterior surface configuration of said part at said one  
5 end of said part.

3. A method of producing a hydroformed part comprising the steps of:
- providing a hydroforming die assembly for hydroforming a part from a tubular blank, the part having a desired configuration different from a configuration of the blank and  
10 including a desired cross section at one end of the part, the die assembly including a die structure having interior surfaces defining a die cavity, the die cavity having a cross sectional configuration conforming to the desired cross section of the part, and a pair of tube-end engaging structures disposed at opposite ends of the die cavity and constructed and arranged to engage opposite ends of the tubular blank, the tube-end engaging structures being  
15 constructed and arranged to seal the opposite ends of the tubular blank and to pressurize hydroforming fluid within the tubular blank for expanding the tubular blank into conformity with the interior surfaces of the die cavity, a first of the tube-end engaging structures having an outer cross-sectional configuration corresponding to the desired cross section at one end of the part;
- 20 moving the first of the tube-engaging structures into forced engagement with one end of the tubular blank to conform the one end of said tubular blank to the outer cross-sectional configuration of the first of the tube-engaging structures and hence the predetermined cross section at the one end of the part; and
- applying pressure within the tubular blank to form the tubular blank in to the desired  
25 configuration of the part.

4. A method according to claim 3, further comprising the step of:

incorporating the part into a product without cutting off the one end of the part formed by the forced engagement of the first of the tube-engaging structures.

5

5. A method of producing a hydroformed part comprising the steps of:

providing a hydroforming die assembly for hydroforming a part from a tubular blank, the part having a desired configuration different from a configuration of the blank and

including a desired cross section at one end of the part, the die assembly including a die

10 structure having interior surfaces defining a die cavity, the die cavity having a cross sectional configuration conforming to the desired cross section of the part, and a pair of tube-end engaging structures disposed at opposite ends of the die cavity and constructed and arranged to engage opposite ends of the tubular blank, the tube-end engaging structures being constructed and arranged to seal the opposite ends of the tubular blank and to pressurize  
15 hydroforming fluid within the tubular blank for expanding the tubular blank into conformity with the interior surfaces of the die cavity;

applying pressure within the tubular blank to form the tubular blank in to the desired configuration of the part; and

20 incorporating the part into a product without cutting off the one end of the part formed in the die cavity.

6. The method of claim 5, further comprising the step of:

moving the first of the tube-engaging structures into forced engagement with one end of the tubular blank to conform the one end of said tubular blank to the outer cross-sectional

25 configuration of the first of the tube-engaging structures and hence the predetermined cross

section at the one end of the part.

7. A tool for expanding a tubular member, comprising:

a first portion having a perimeter formed by a plurality of sides, said perimeter

5 forming the desired inner shape of the tubular member; and

a beveled portion having a mating end coupled to said first portion, a free end

opposite to said mating end, a longitudinal axis, and a plurality of inclined surfaces positioned

between said mating end and said free end, each of said plurality of inclined surfaces

converging from said mating end toward said free end and toward said longitudinal axis, said

10 plurality of inclined surfaces being of the same number as said plurality of sides, and

each of said plurality of sides of said first portion being substantially parallel to said longitudinal axis.

8. A tool according to claim 7, wherein

15 said plurality of sides is four sides and said plurality of surfaces is four surfaces.

9. A tool according to claim 8, wherein

said plurality of sides form a rectangle.

20 10. A tool according to claim 7, wherein

each of said plurality of surfaces of said beveled portion is inclined between

approximately 13 to 17 degrees relative to said longitudinal axis.

11. A tool according to claim 7, wherein


25 said first portion is coupled to a base having a shoulder directly adjacent said plurality

of sides around said perimeter of said first portion, said shoulder being substantially perpendicular to said longitudinal axis.

12. A tool according to claim 7, wherein

5 said free end of said beveled portion has an opening that extends completely through said beveled portion and said first portion.

1/9

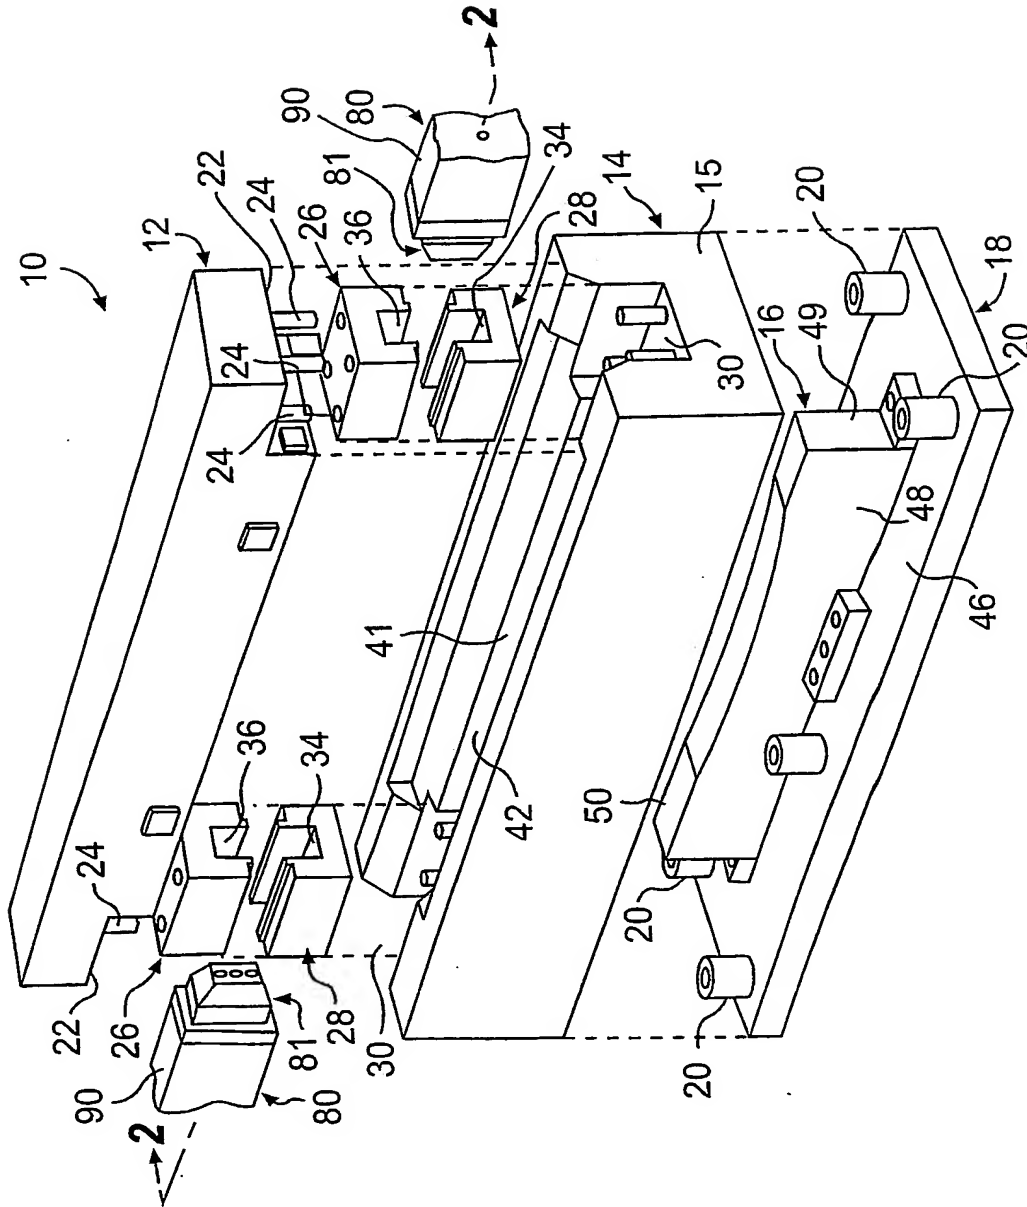

**FIG. 1**

2/9

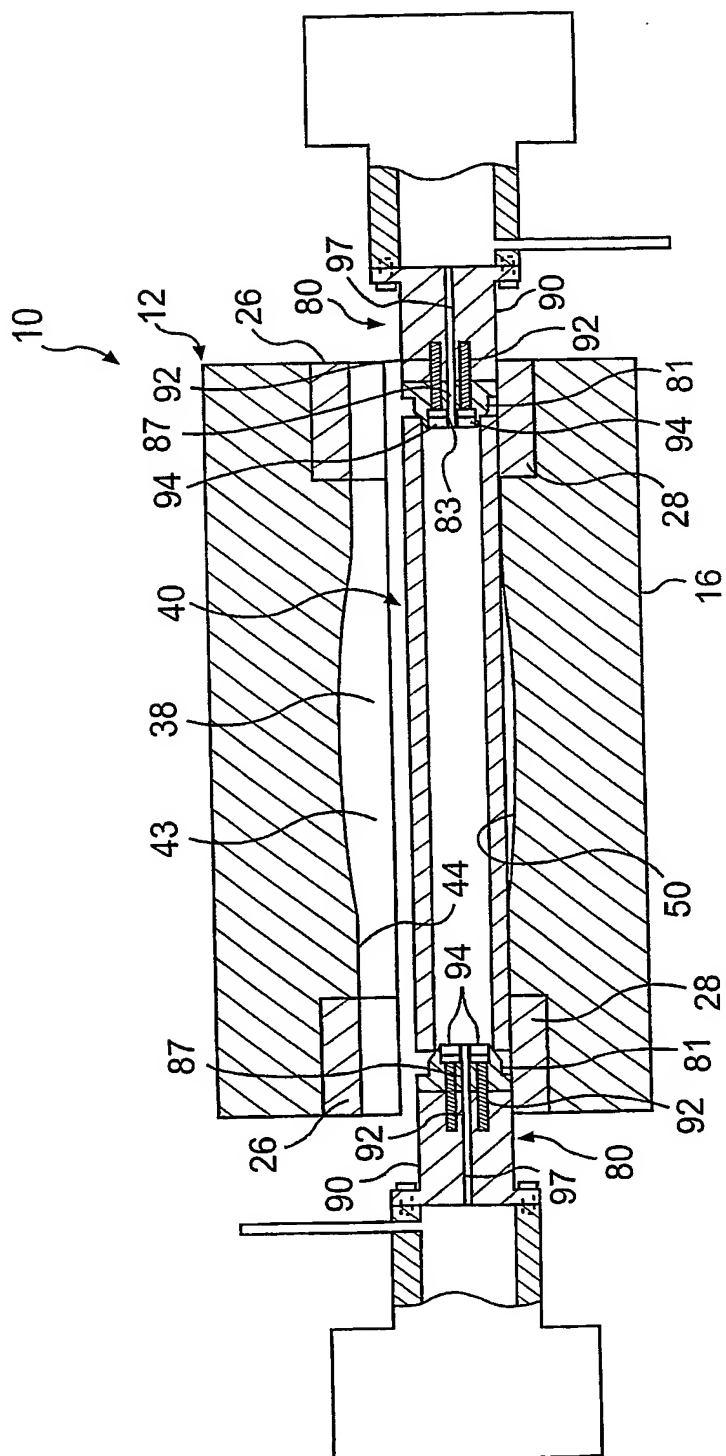


FIG. 2



3/9



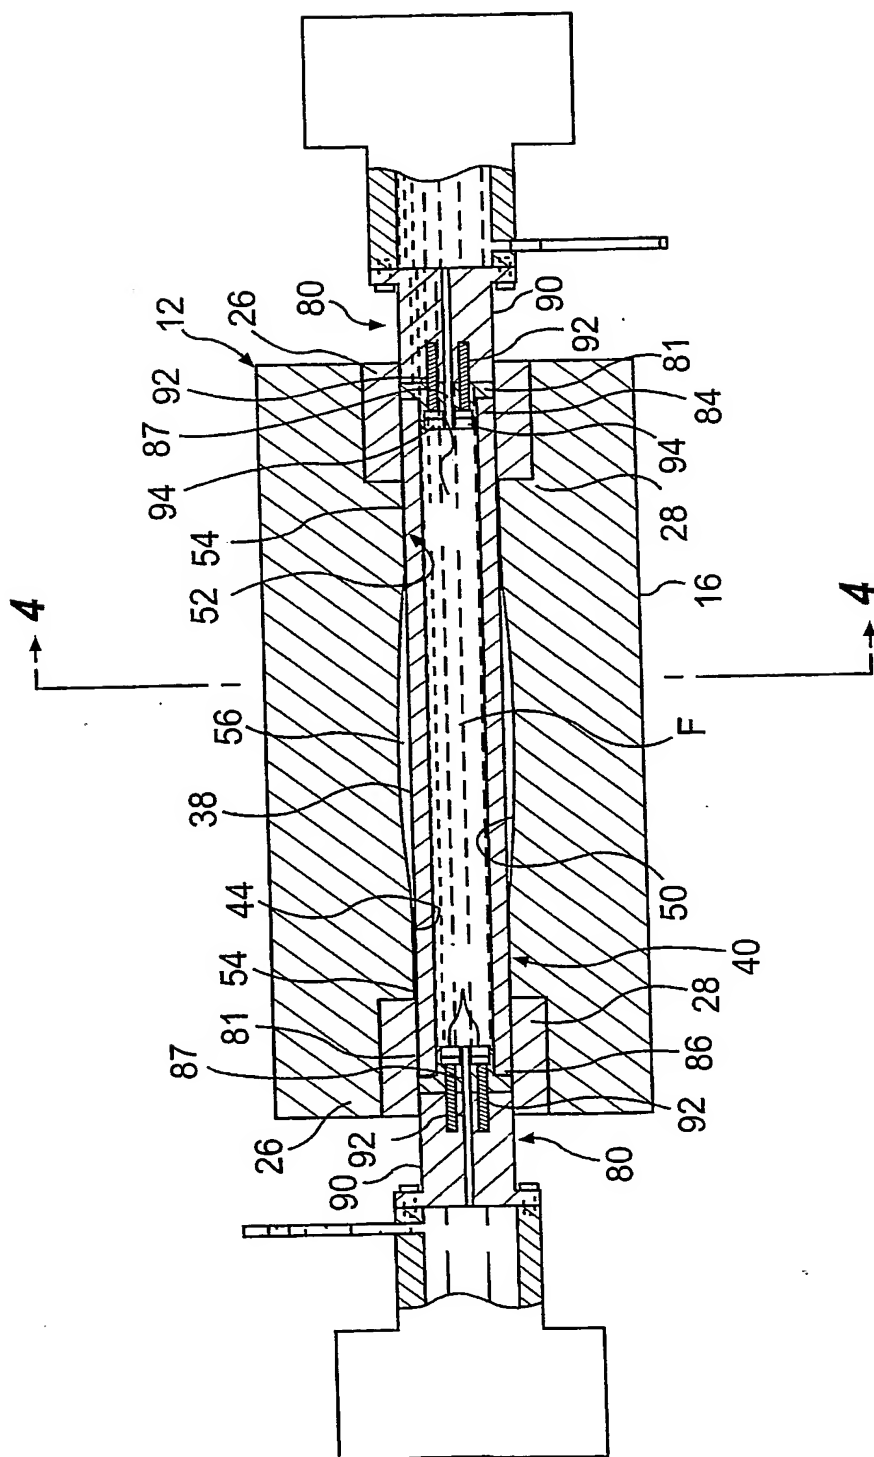


FIG. 3


4/9

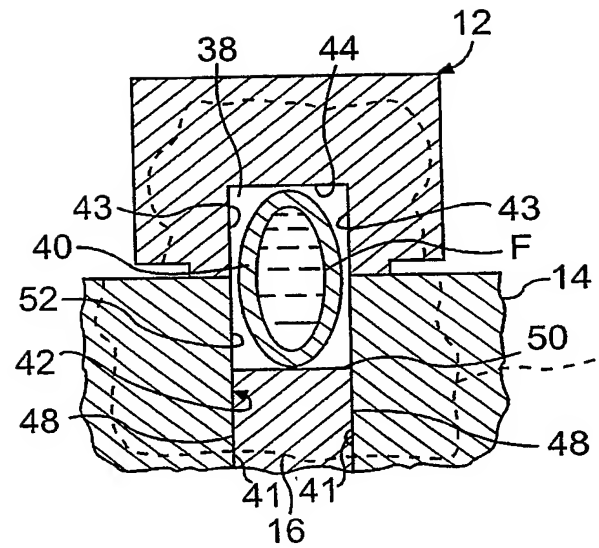

**FIG. 4**

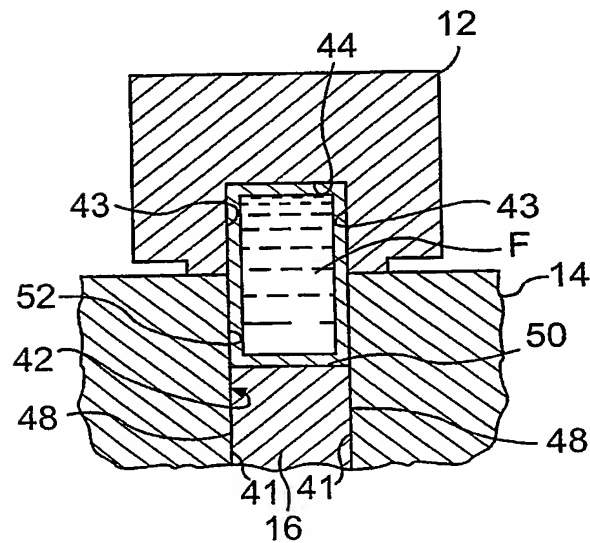


**FIG. 5**

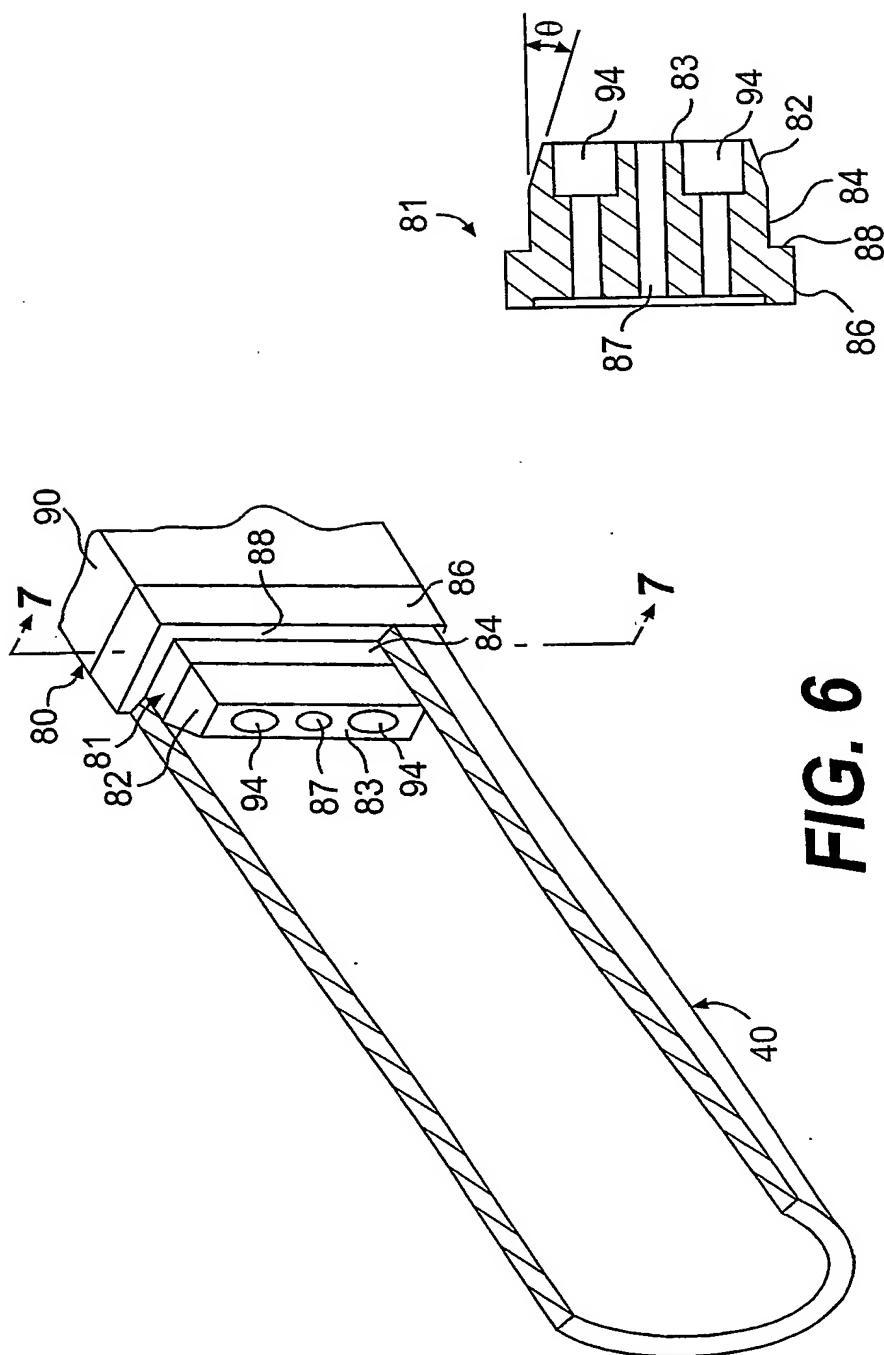

**FIG. 7**

6/9

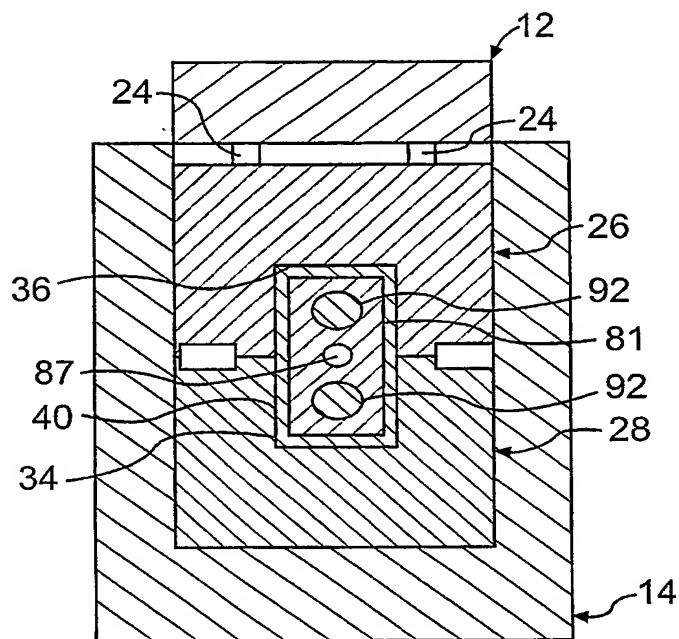

**FIG. 8**

7/9

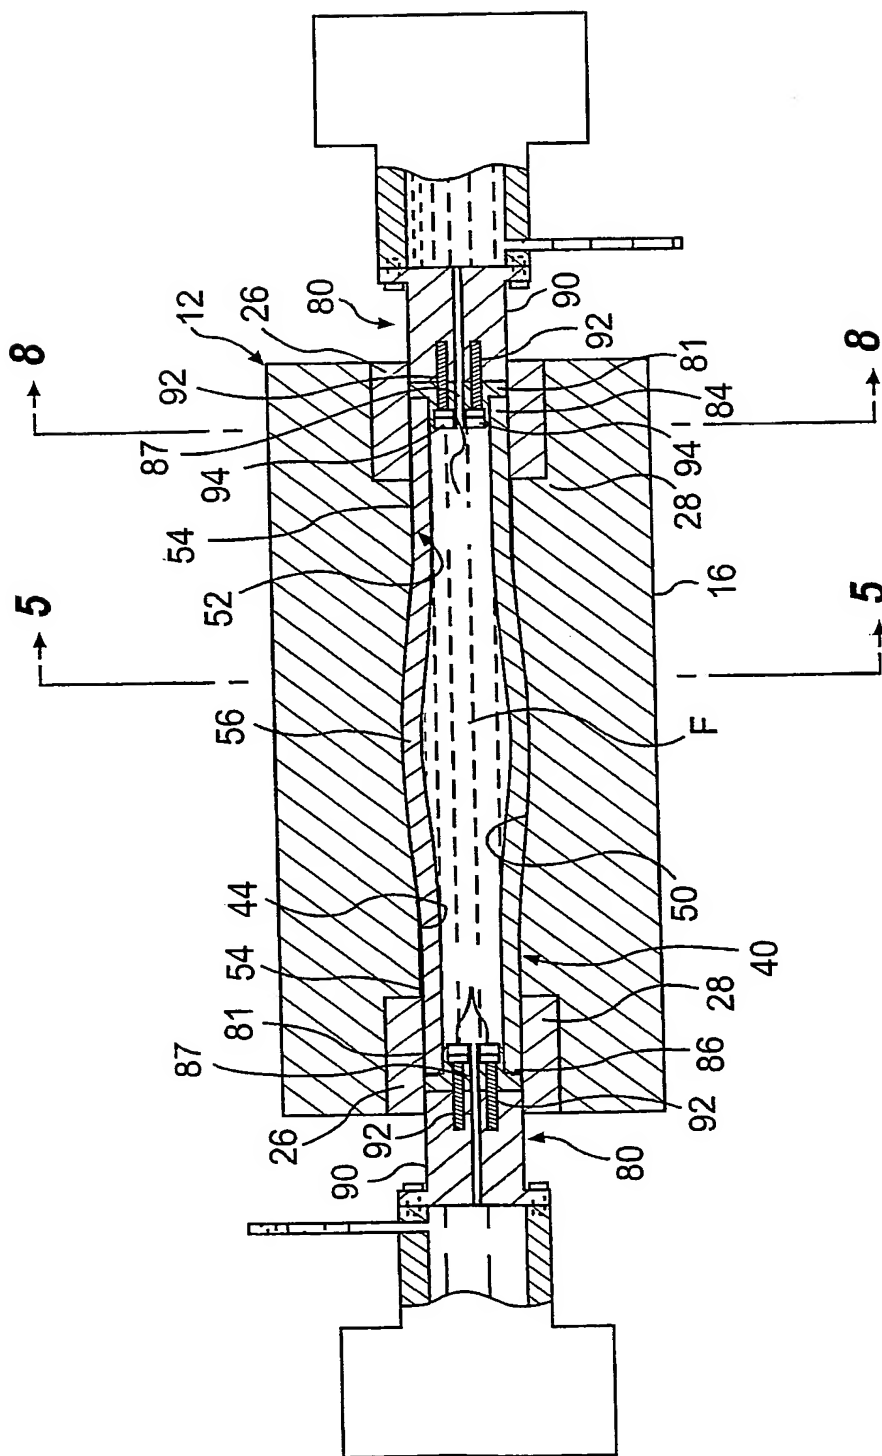


FIG. 9

8/9


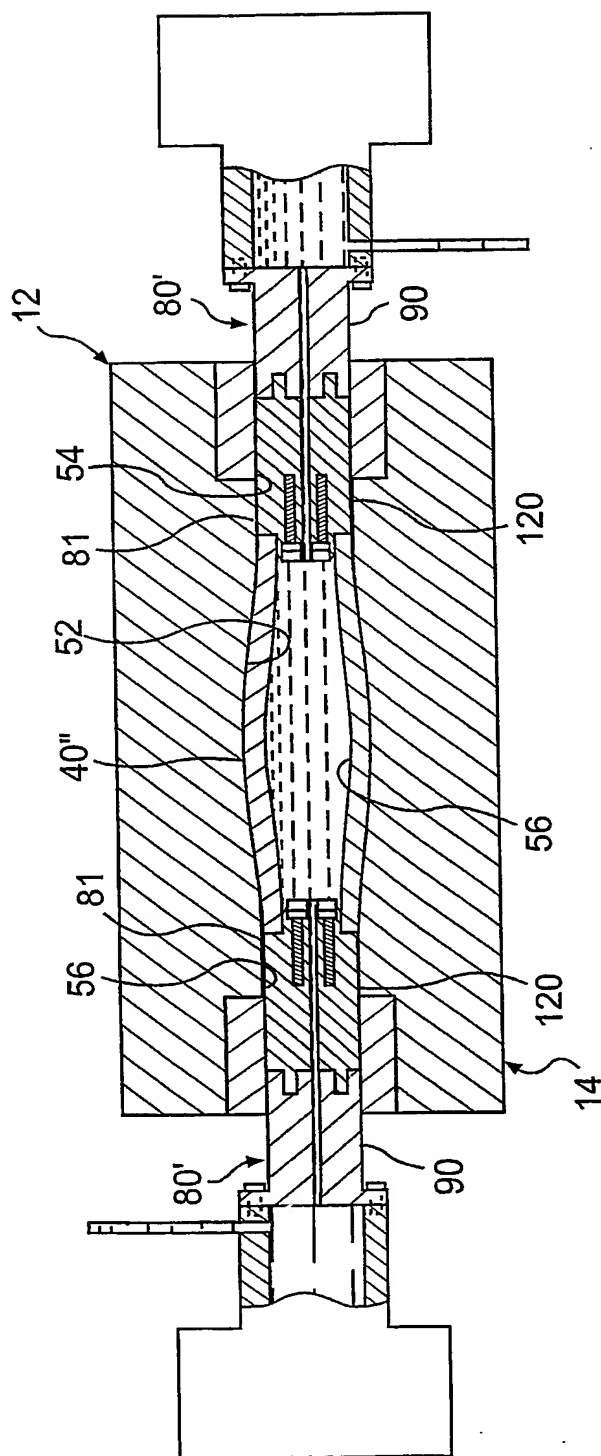


FIG. 10

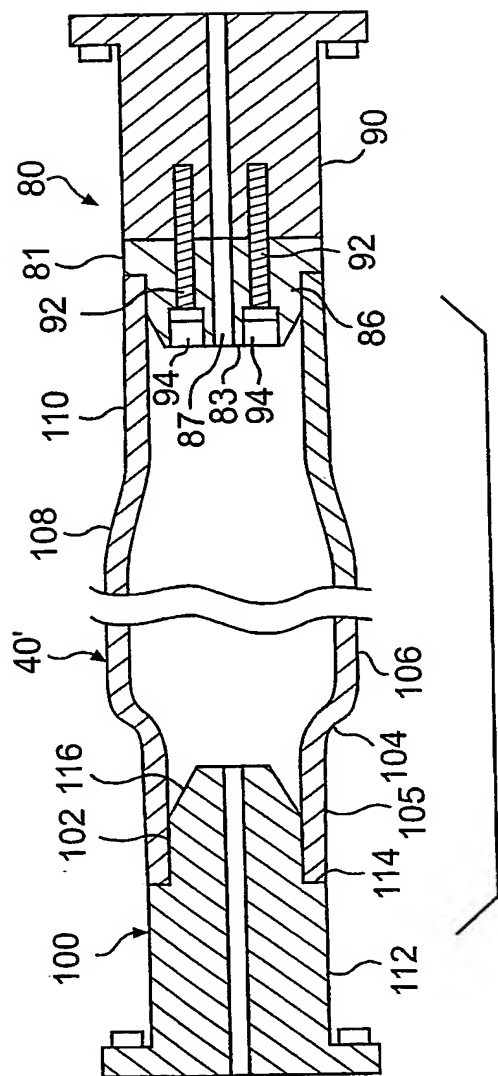

**FIG. 11**

## INTERNATIONAL SEARCH REPORT

Application No

PCT/IB 01/01946

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 B21D26/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 B21D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 022 073 A (NISSAN MOTOR) 26 July 2000 (2000-07-26) the whole document ---	1-12
X	WO 00 48761 A (MARKS LARRY DOUGLAS ;MORPHY GARY EARLE (CA); BESTARD THOMAS LLOYD) 24 August 2000 (2000-08-24) the whole document ---	1-12
X	US 5 735 156 A (ARAYA TAKESHI ET AL) 7 April 1998 (1998-04-07) the whole document ---	1-12
A	US 5 107 693 A (HANSEN RAINER ET AL) 28 April 1992 (1992-04-28) ---	
A	US 6 006 567 A (BROWN JAMES H ET AL) 28 December 1999 (1999-12-28) ---	
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

28 February 2002

Date of mailing of the international search report

06/03/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Peeters, L



## INTERNATIONAL SEARCH REPORT

Application No  
PCT/IB 01/01946

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 170 557 A (RIGSBY DONALD R) 15 December 1992 (1992-12-15) -----	
A	US 4 761 982 A (SNYDER GEORGE K) 9 August 1988 (1988-08-09) -----	
A	US 5 475 911 A (DEHLINGER JAMES R ET AL) 19 December 1995 (1995-12-19) -----	
A	DE 198 33 006 A (MELEGHY HYDROFORMING GMBH & CO) 3 February 2000 (2000-02-03) -----	

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

# INTERNATIONAL SEARCH REPORT

Information on patent family members

al Application No

PCT/IB 01/01946

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1022073	A	26-07-2000	JP 2000202535 A EP 1022073 A1 US 6266986 B1	25-07-2000 26-07-2000 31-07-2001
WO 0048761	A	24-08-2000	US 6279364 B1 AU 2310400 A BR 0008234 A EP 1152843 A1 WO 0048761 A1	28-08-2001 04-09-2000 27-11-2001 14-11-2001 24-08-2000
US 5735156	A	07-04-1998	JP 8090097 A	09-04-1996
US 5107693	A	28-04-1992	DE 4017072 A1 ES 2044742 A1 GB 2244228 A , B	28-11-1991 01-01-1994 27-11-1991
US 6006567	A	28-12-1999	AU 3287197 A EP 1017516 A1 WO 9851428 A1	08-12-1998 12-07-2000 19-11-1998
US 5170557	A	15-12-1992	NONE	
US 4761982	A	09-08-1988	NONE	
US 5475911	A	19-12-1995	US 5363544 A AT 156396 T DE 69404757 D1 DE 69404757 T2 EP 0627272 A2 ES 2105523 T3 JP 2997909 B2 JP 6328158 A US 5582052 A US 5600983 A	15-11-1994 15-08-1997 11-09-1997 02-01-1998 07-12-1994 16-10-1997 11-01-2000 29-11-1994 10-12-1996 11-02-1997
DE 19833006	A	03-02-2000	DE 19833006 A1	03-02-2000